





EARTHLOK[®]

flexible concrete matting

Earthlok's proprietary 60/60kN geogrid used for Earthlok geosynthetic concrete products are formulated with state-of-the-art antioxidants and stabilizers for outstanding long-term durability and stability in exposed applications and in harsh climates.

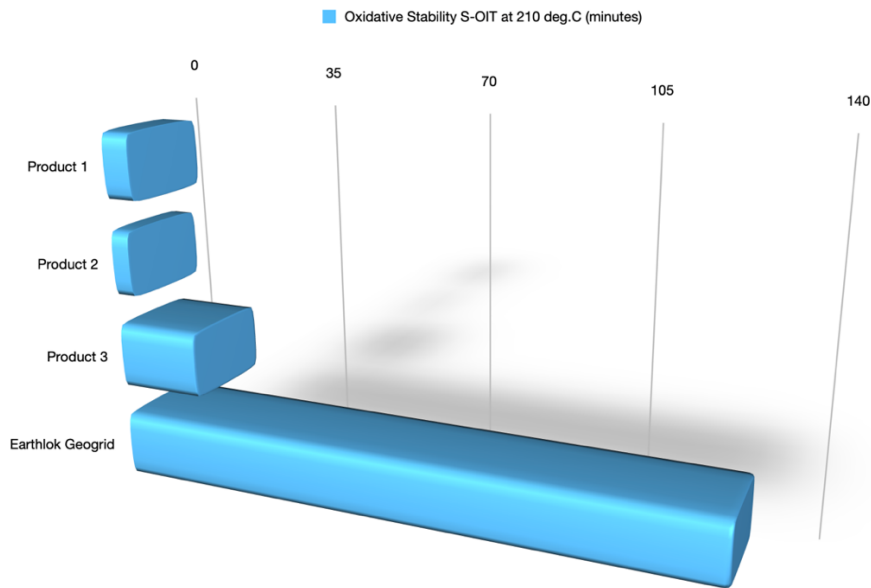

The Earthlok geogrid S-OIT stability of 128 mins at 210 deg.C translates to 256 mins at 200 deg.C

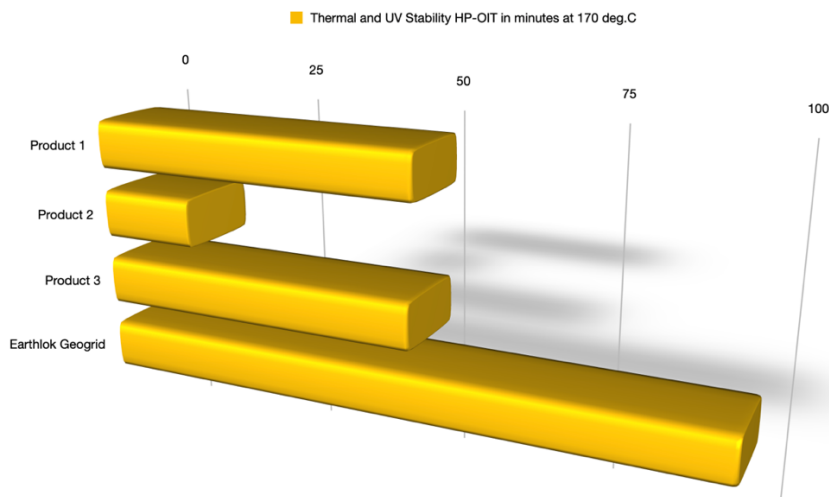

The Earthlok geogrid HP-OIT stability of 97 mins at 170 deg.C translates to 388 mins at 150 deg.C

CONTACT: **Darren Wade** DIRECTOR
E. darren@earthlok.com.au
M. 0431 450 726
W. www.earthlok.com.au

