


NANOXPLORE

Unleashing the Power of Graphene



NanoXplore GmbH

Dr. Francis Nedvidek





Introduction

- ⬡ Few Layer Graphene (FLG) from natural flake graphite
 - ⬡ Proprietary environmentally friendly exfoliation technology (4 patents)
 - ⬡ 60 tonnes/year production capacity → 18 tonnes in place today

- ⬡ heXo-G graphene based solutions

- ⬡ Powder for compounders
- ⬡ Pellets for masterbatch (PE, PP, PC, PET....)
- ⬡ Compounds for energy and industrial applications
- ⬡ Injection and blow molded plastic parts

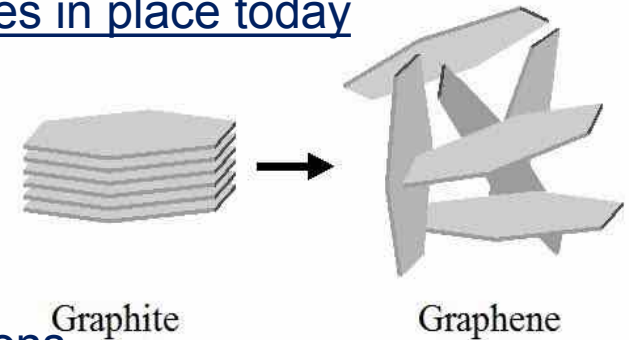

- ⬡ Target Markets:

- ⬡ Graphene-enhanced pellets for
 - ⬡ thermoplastics, thermosets & resins for textiles
- ⬡ Specialized compounds for Li-ion electrodes

A Brief History



Four Initial Patents:

Functional graphene, graphite-graphene composite, thin graphite



Birth:

R&D services company focused on nanomaterials

Transformation:

- Graphene production
- Graphite applications

Mason Partnership:

Graphite Investment


Opening of St-Laurent

4 tonnes / year
German office & Two Carbon investment


Acquisition of



Capacity expansion
18T/Year graphene



Natural Graphite → Injection Molded Plastic

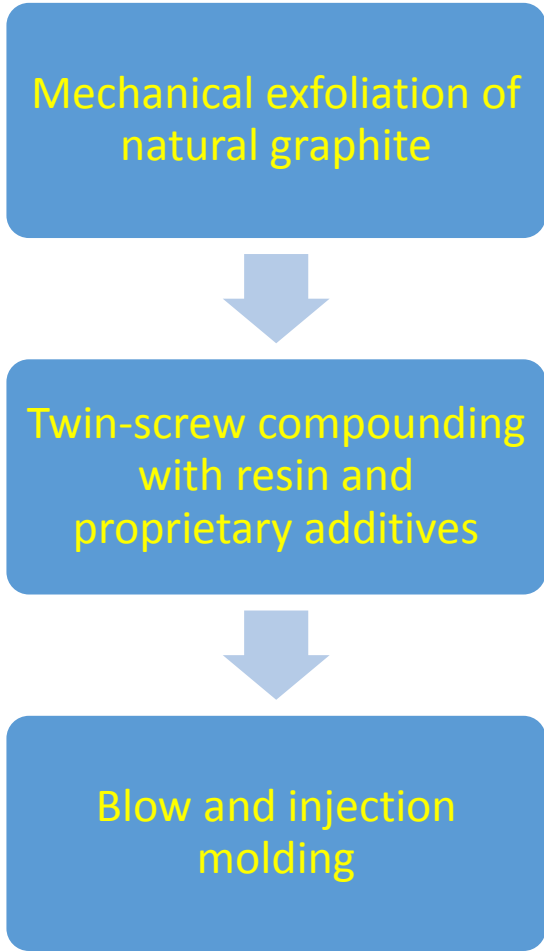

Major Graphite Producer Partners



Production and R&D Facilities in Switzerland




NanoXplore has established a strong partnership with Colorplastic SA here in Switzerland,

With deep and broad knowledge of additives Colorplastic and NanoXplore together produce customized compounds and master batches covering the thermoplastic and surface technology sectors.



Own Formulation and Process Innovation



- Identify issues
- Propose improvements / innovations
- Share the Data

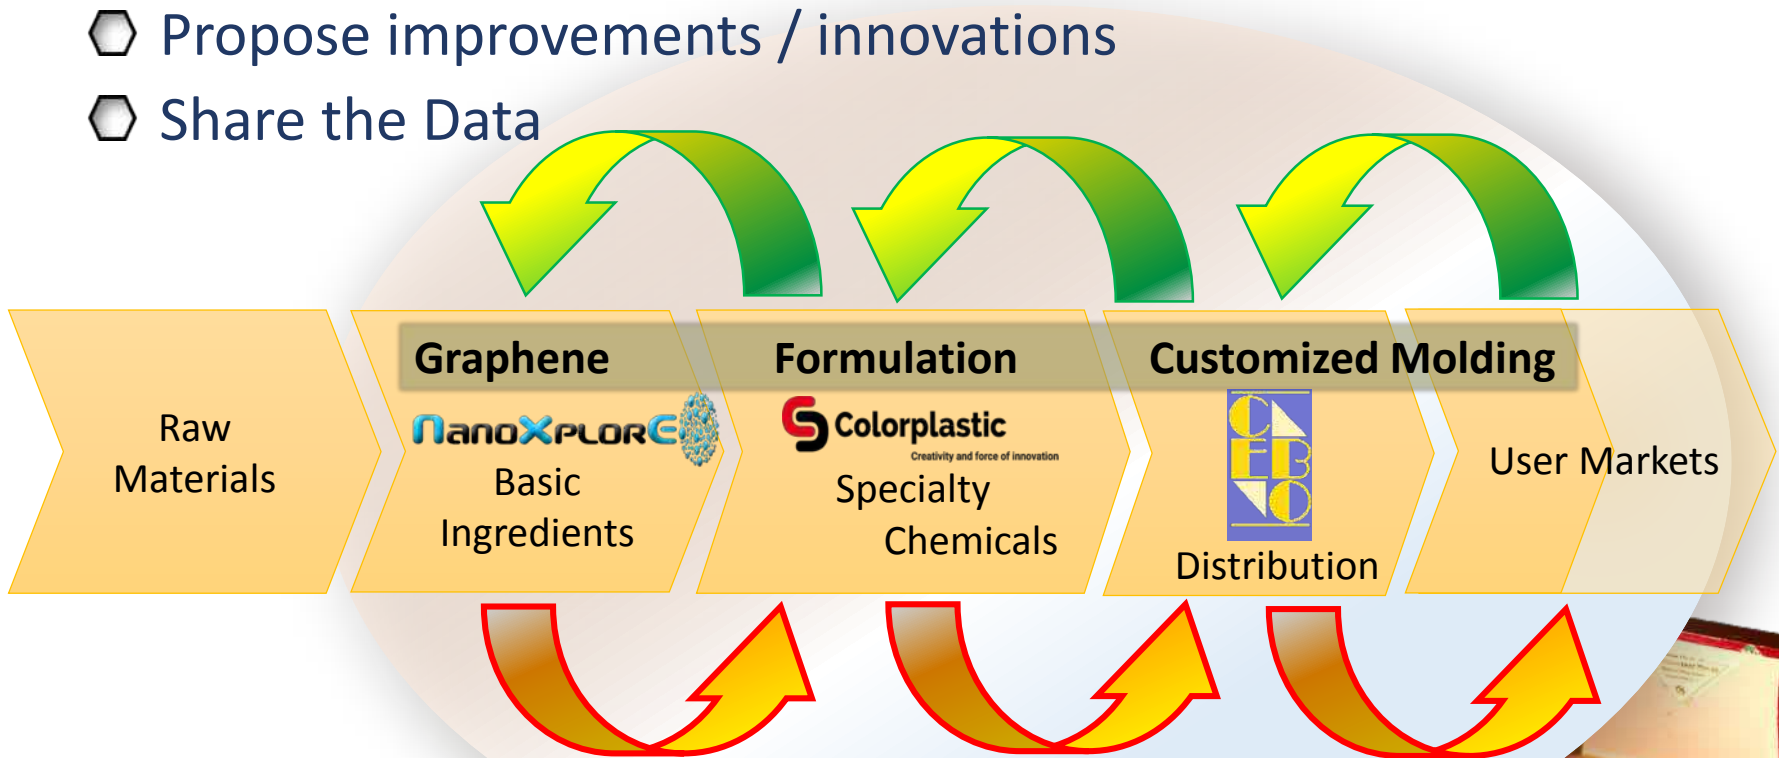

- Engineer solution(s)
- Provide improvements / changes
- Propose improvements / innovations




Capture Broader Polymer Value Chain

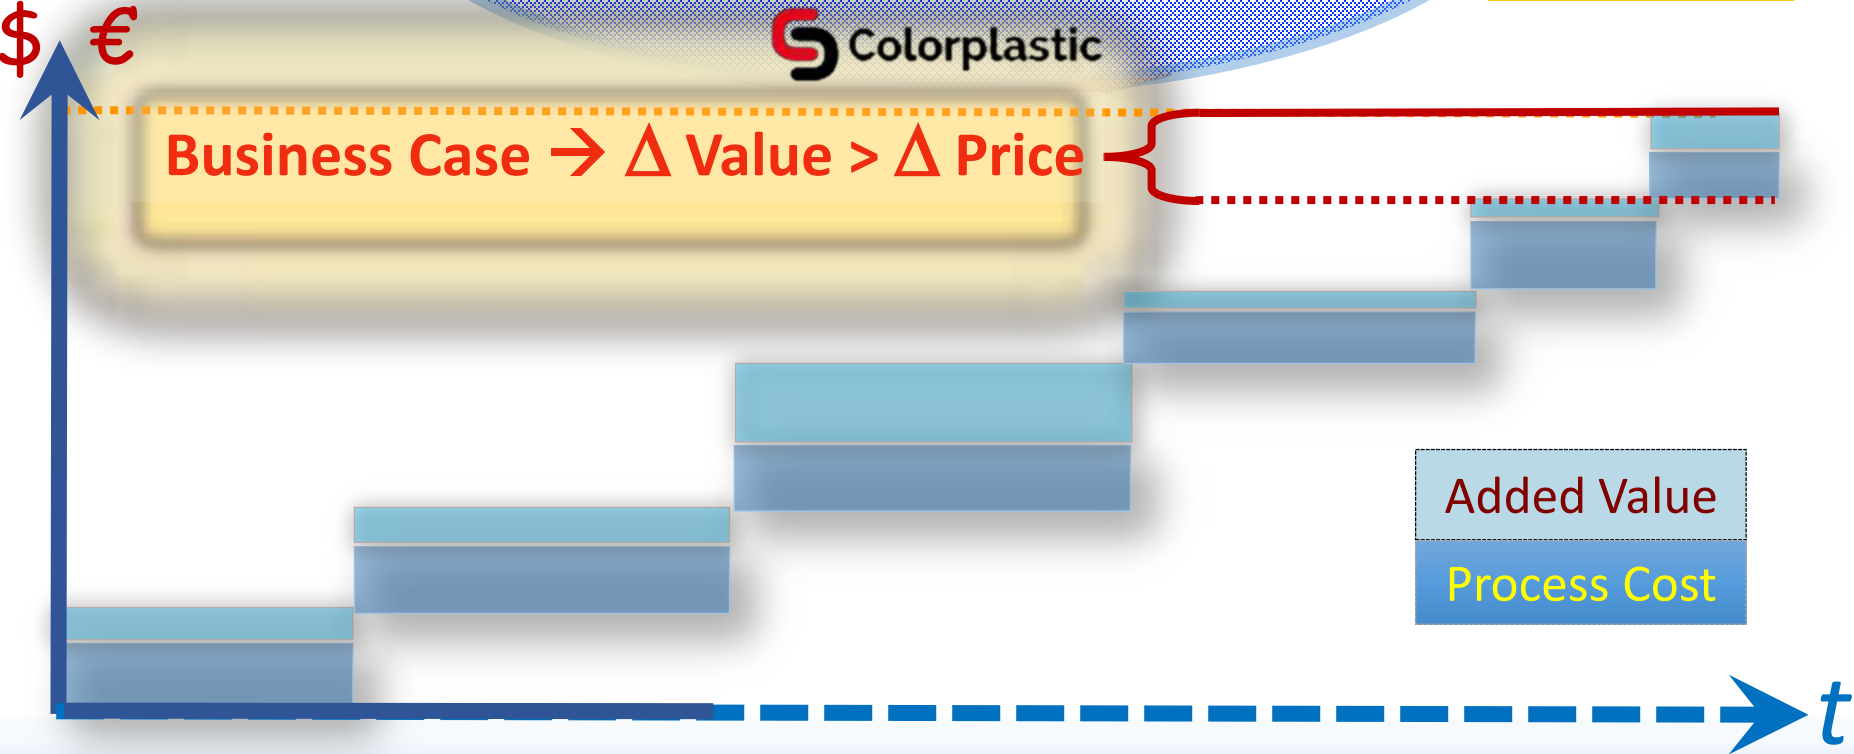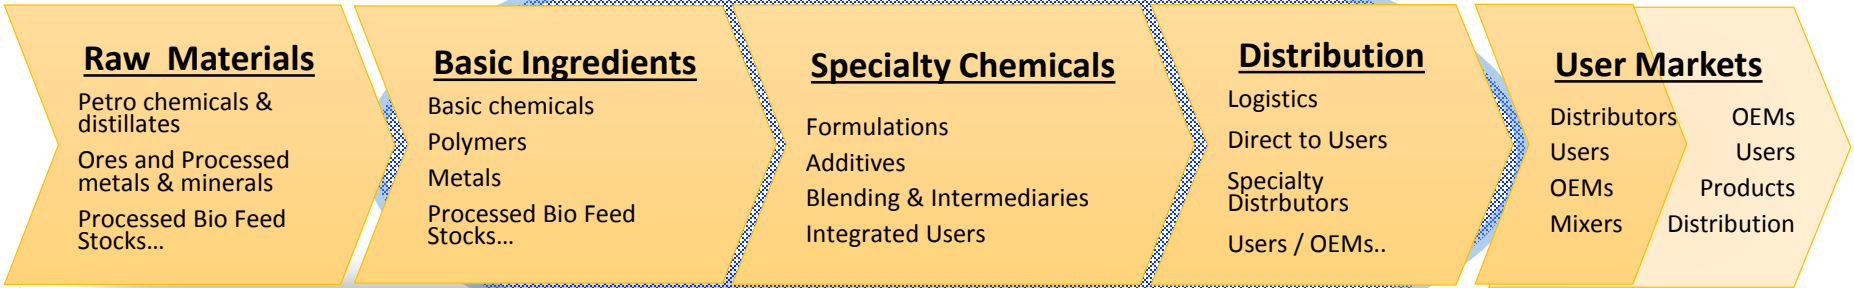


he-X-o G graphene → characteristics

- ⬡ Water-based environmentally friendly exfoliation (4 patents)
- ⬡ Low surface defects; 2-5 layers; 1 μm – 10 μm lateral
- ⬡ Ease of dispersion → polymers & resins
- ⬡ Industrial scalable & high quality
- ⬡ Graphite flakes → Graphene / Masterbatch / Compound
- ⬡ Price points → viable business case
- ⬡ "Multifunctional" enhancement of polymers

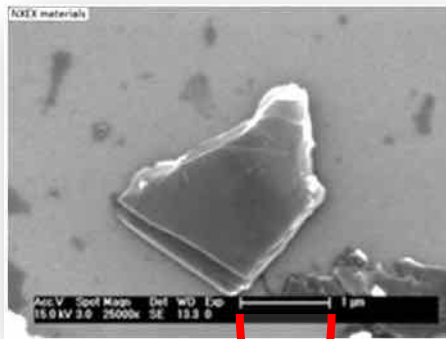

1 μm

Up the Polymer Pyramid

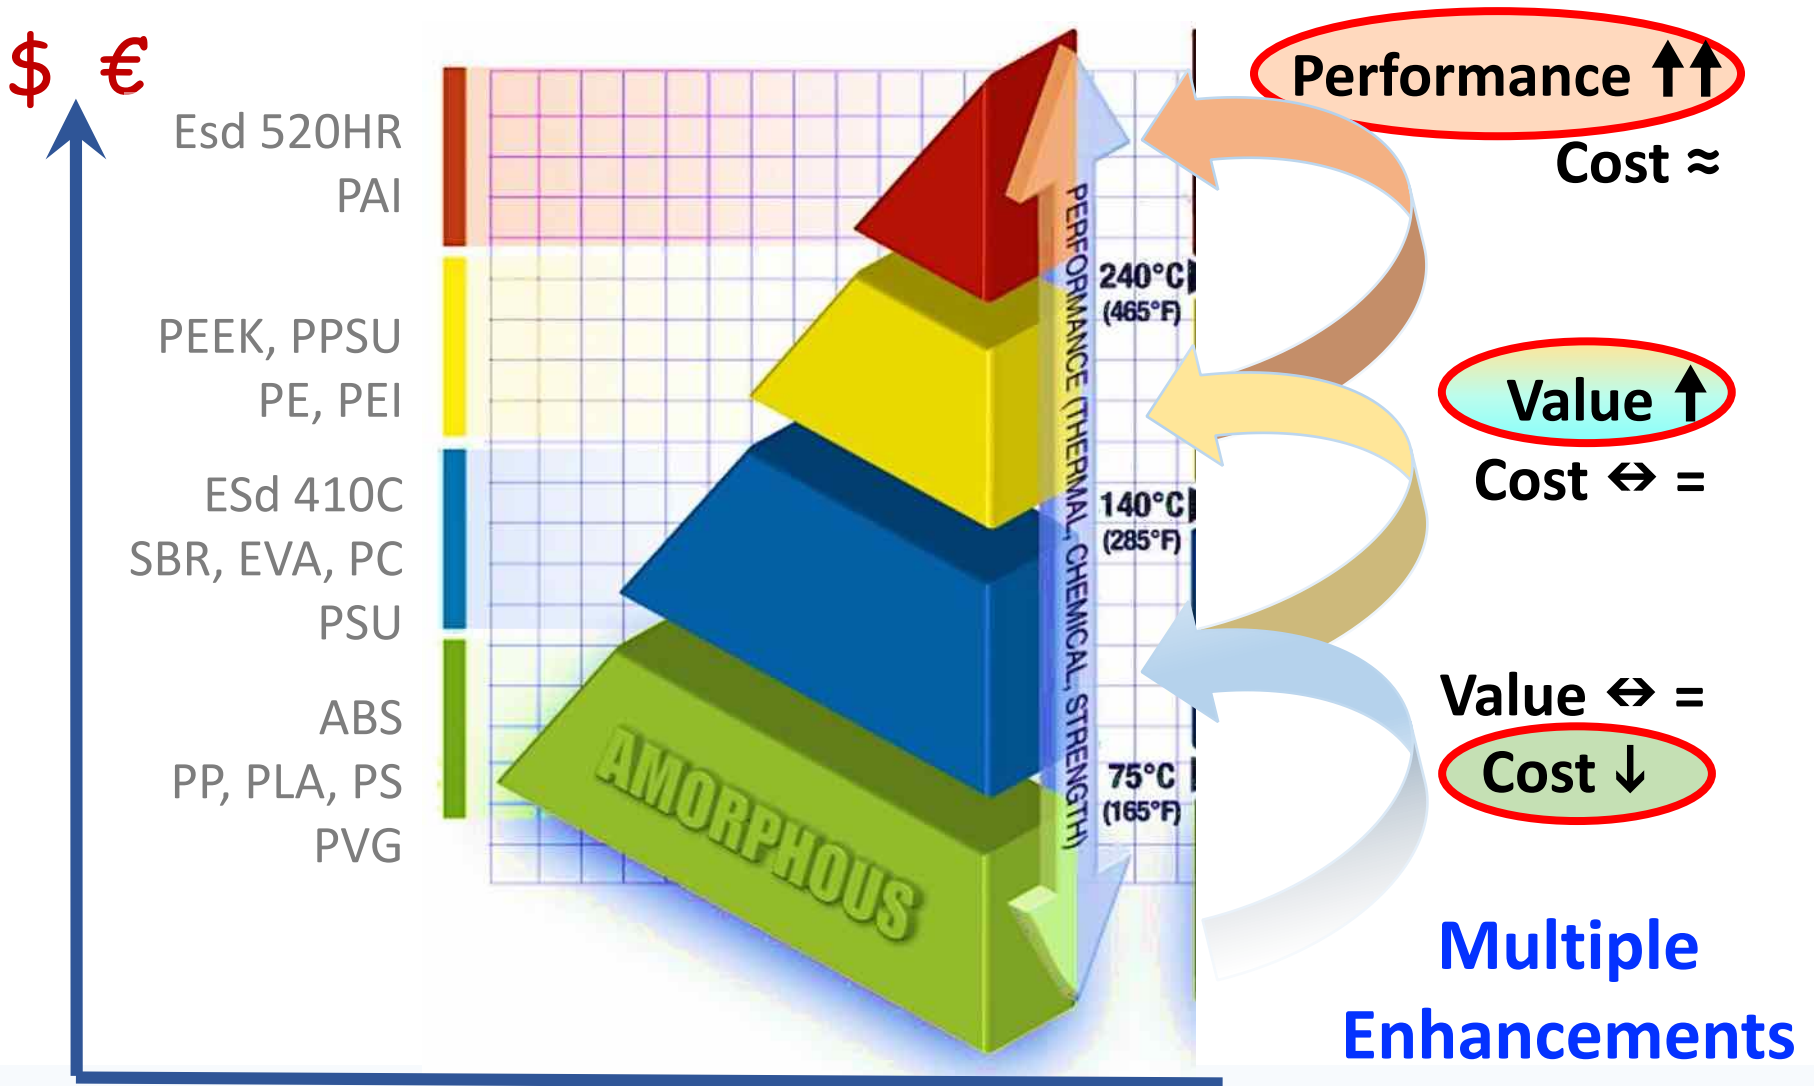


Polymer performance enhancement examples

Material	Impact	heXo-G wt%
LLDPE	+10% in yield strength	2%
HDPE	+14% in yield strength	0.5%
PE	Conductivity 10^{-6} S/m	10-12%
PA 6-6 (nylon)	+10% in tensile strength	1%
Silicone-rubber	+10% in abrasion resistance	0.1%
ABS	4X thermal conductivity	0.2%
UHMWPE	+40% in fracture toughness	0.5%
HDPE	+22% in oxygen barrier	1%

Graphene-enhanced TPU


 Tensile Modulus

 Flexural Modulus

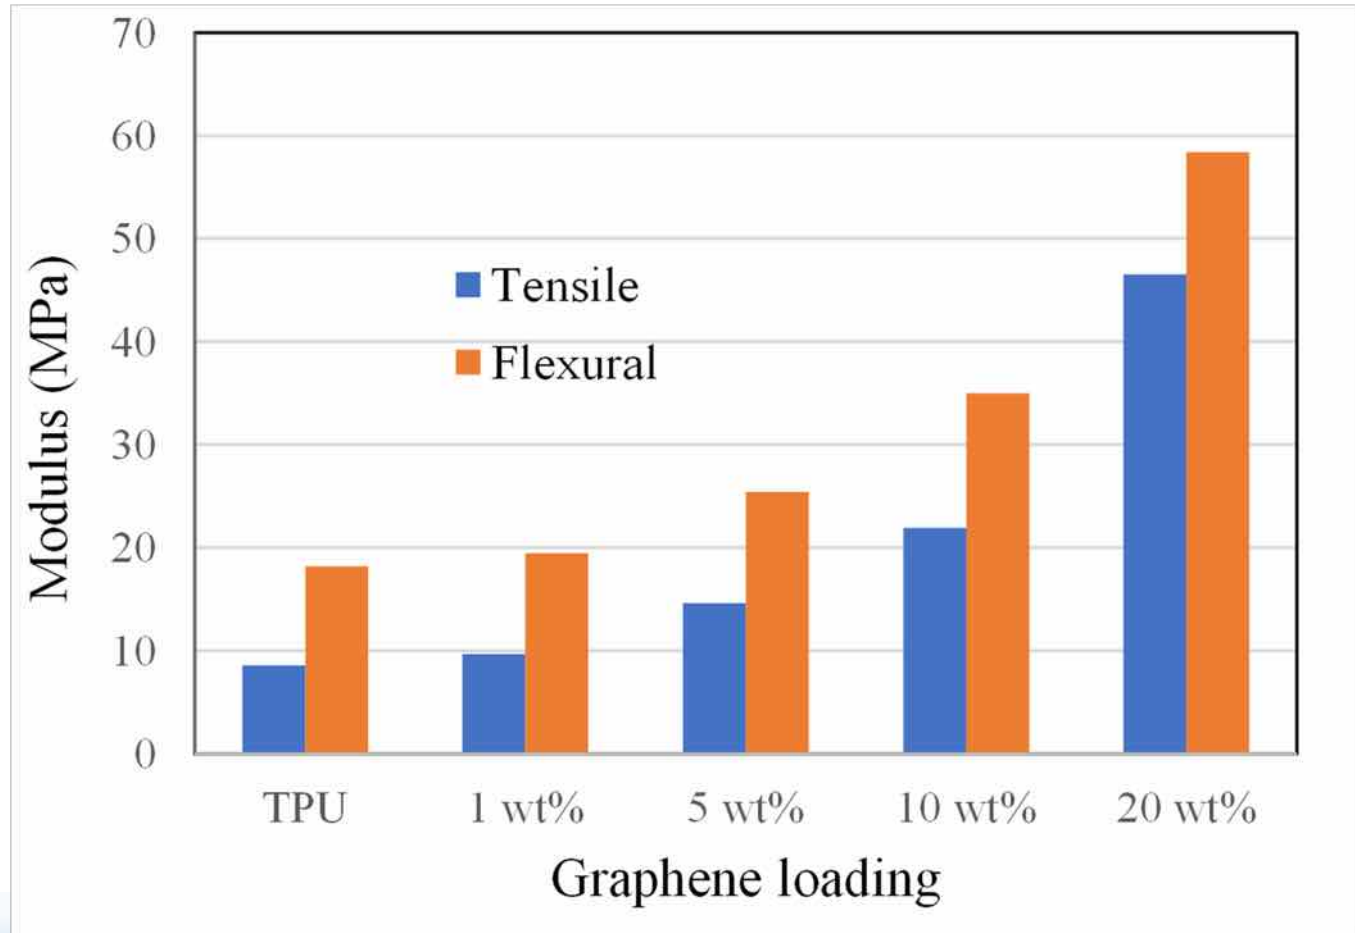


Dimensional Stability

- ⬡ Graphene reduces shrinkage and increases dimensional stability of LDPE.
- ⬡ 1 wt.% he-X-o G 4 reduces shrinkage by 35% vs raw LDPE
- ⬡ 5 wt.% he-X-o G 4 reduces shrinkage by 44% vs raw LDPE

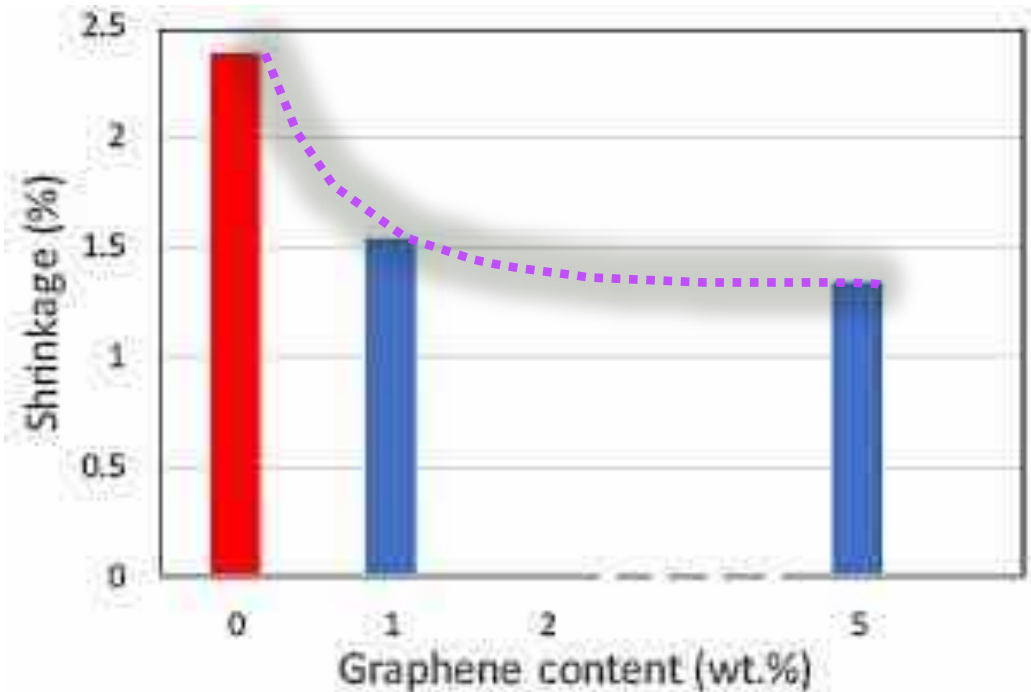


Graphene increases operating temperature

- ⬡ Increases polymer thermal stability in LDPE (using heXo-G V20)
- ⬡ Increased degradation temperatures
- ⬡ Improvement of 56°C at 10 wt.% graphene (TGA curve shift)

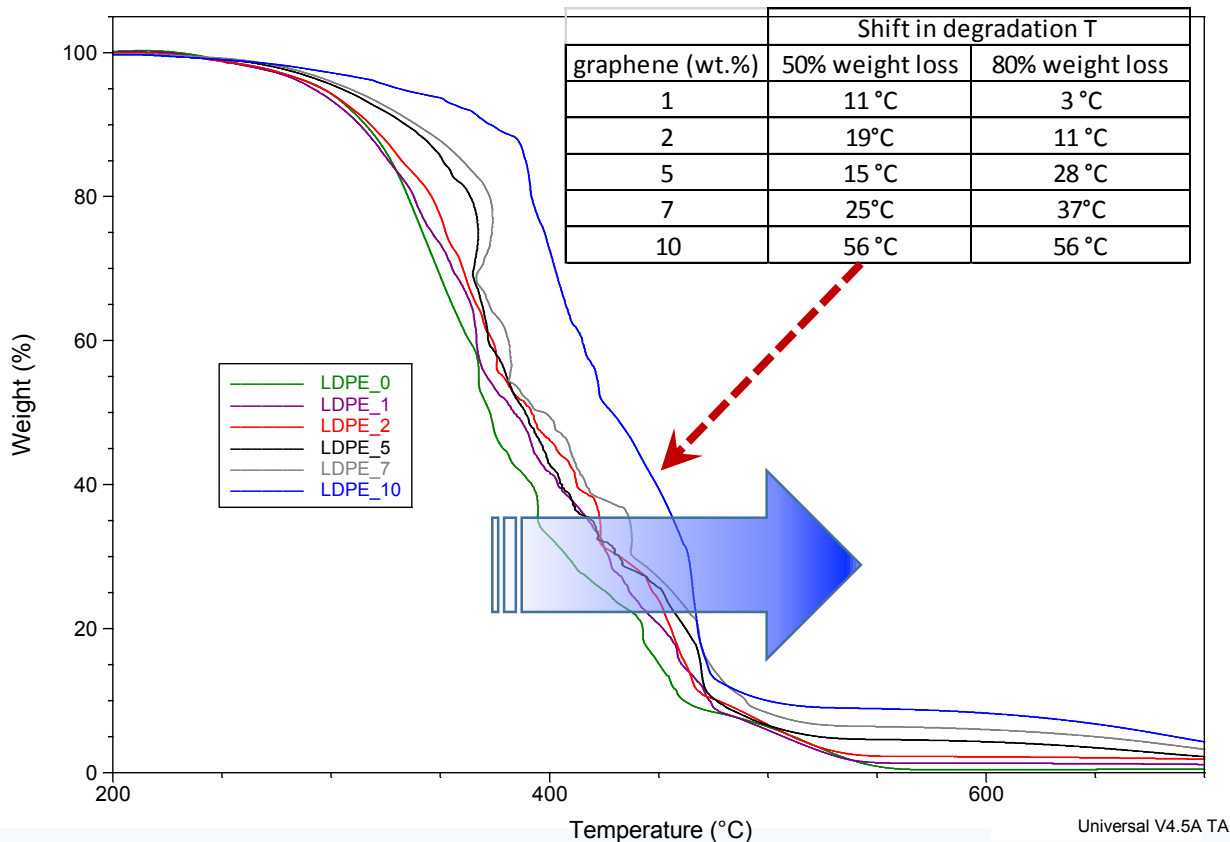


Electrical Properties of graphene - HDPE

- ⬡ Graphene he-X-o G disperses anisotropic in HDPE
- ⬡ HDPE 1 wt.% graphene composite conductivity = vacuum dielectric
- ⬡ HDPE 15 wt.% percolation threshold conductivity increases with graphene loading
- ⬡ HDPE at 30 wt.% loading increases electrical conductivity $\times 10^{14}$

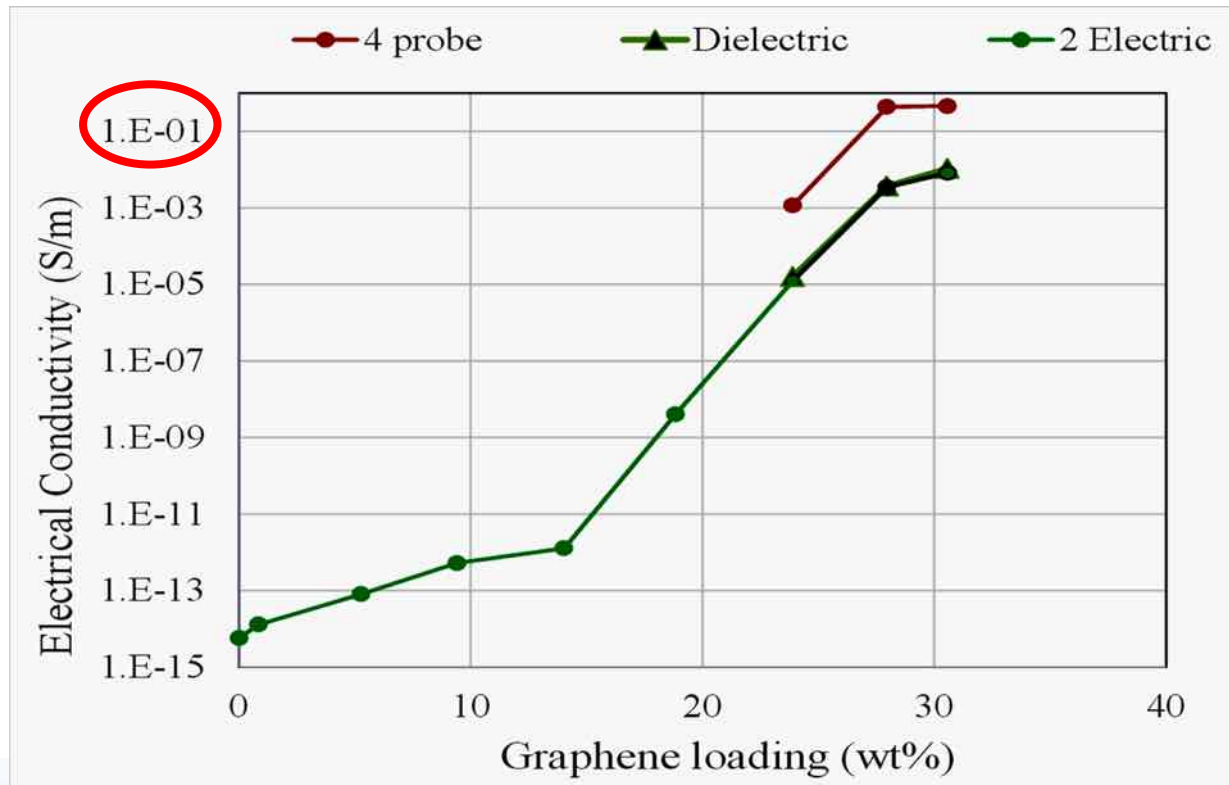


Thermal conductivity vs additive loading in epoxy resin

- ⬡ Weight and cost reduction in transportation & aerospace
- ⬡ Thermally conductivity polymers enabling electronics deployment
- ⬡ No degradation → boron nitride (BN), aluminum nitride (ALN)... need high wt% concentrations but degrade mechanical properties
- ⬡ heXo-G graphene provides higher thermal conductivity
 - ⬡ Can complement and/or reduce the amount of additives used

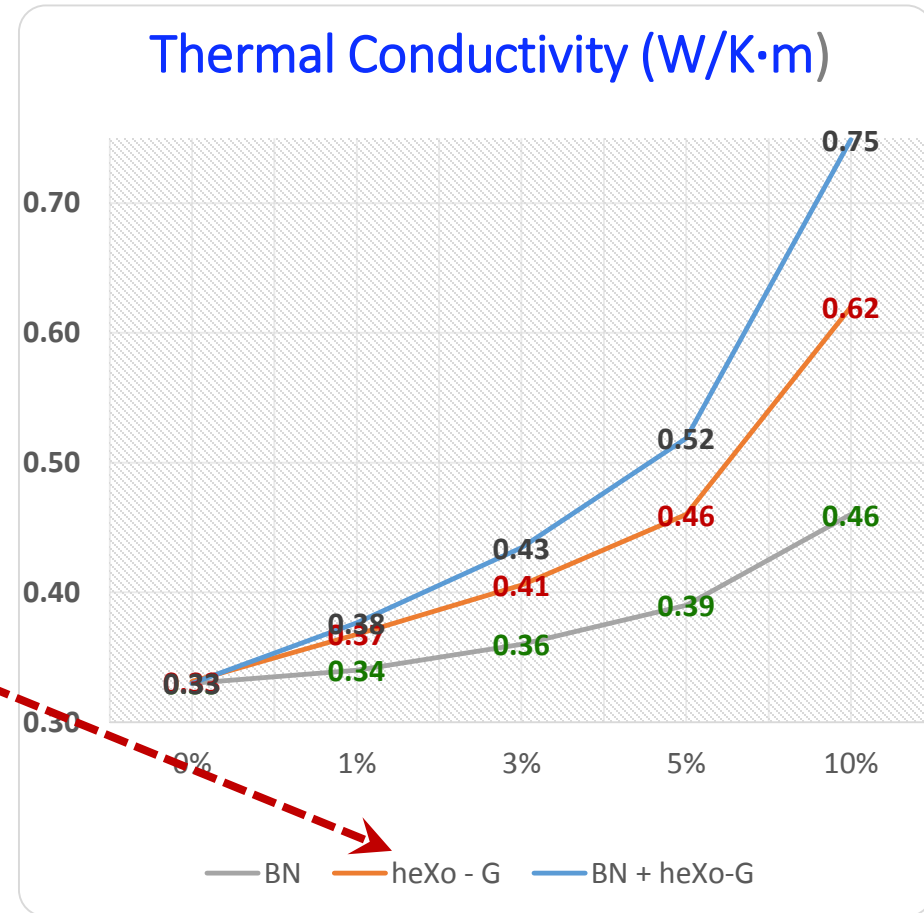


Thermal properties of graphene of LLDPE

- ⬡ Measured out-of-plane thermal conductivity
- ⬡ Initial slope is 0.02 W/K·m·% graphene he-X-o G V20
- ⬡ Steeper slope of 0.04 W/K·m·% beyond 12% percolation threshold
- ⬡ Thermal conductivity of 2.32 W/K·m reached for 50 wt.% graphene (**factor of 10x**)

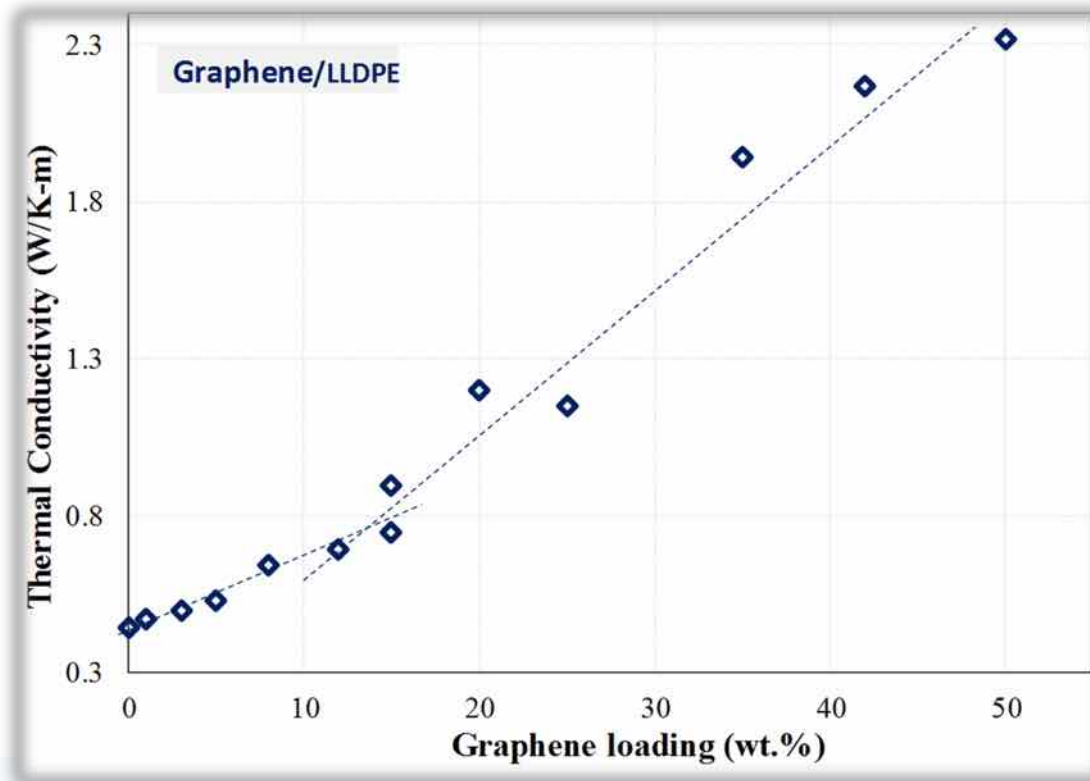

EMI shielding example

- ⬡ Metal-base coatings provide high conductivity, but are heavy, impacted by corrosion and complex to manufacture
- ⬡ Polymer composites with heXo-G V20 demonstrate >40dB X-Band
- ⬡ High shielding effectiveness **>99%** reduction for 8-12 GHz)
 - ⬡ Lightweight and corrosion resistant
 - ⬡ Static and UV protection
 - ⬡ Increases strength + minimizes elongation

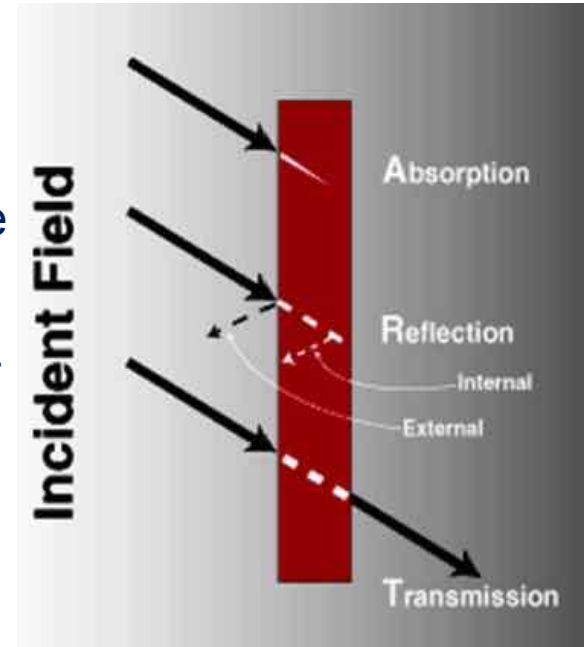

$$SE \text{ (dB)} = SE_A \text{ (dB)} + SE_R \text{ (dB)}$$

TPU/CB (10 wt%)	TPU/CNT (10 wt%)	HDPE/CB (20 wt%)	TPU/heXo-G (10 wt%)	TPU/heXo-G (20 wt%)
12.2 dB*1	21.8 dB*1	16 dB*2	29.6 dB	40.0 dB

References

- *1: Ramoa & al. PolymInt 2013;62:1477-1484
- *2: Dinesh & al. ICEBEA'2012, Jan.7-8 2012, Dubai

He-X-o G in geothermal piping

- ⬡ PE-100 base polymer
- ⬡ Disperse graphene he-X-o G V4 @ 1 wt% loading
- ⬡ Use grade he-X-o G V20 @ 8 wt% loading
- ⬡ Doubles thermal conductivity (0.8 W/m·K)
- ⬡ Increases tensile strength by 30% with minimal elongation compromise
- ⬡ Retains high impact resistance and improve the flexural modulus



Other Applications

- ⬡ Stronger + thermally conductive 3D printing materials
- ⬡ Plastics with EMI shielding properties
- ⬡ Antistatic and impermeable packaging
- ⬡ Thermally conductive polymers / epoxies
- ⬡ Tougher, abrasion resistant and hydrophobic yarns/textiles/rubbers
- ⬡ Corrosion resistant paints / coatings
- ⬡ Higher capacity battery electrodes / fuel cells





Unleashing the Power of Graphene

Head office:

*25 Boul. Montpellier
Saint Laurent (Montreal),
Quebec, Canada
H4N 2G3*

*Phone: +1 514 935 1377
www.nanoxplore.ca*

Europe Office:

NanoXplore GmbH
An Der Fahrt 5
55124, Mainz
Germany

Phone: +49 162 263 8032



Creativity and force of innovation

Europe Production:

Colorplastic AG

Chemin du Vuasset 2-4

CH-1028 Prévèrènges

Phone: +41 21 803 75 76

www.colorplastic.ch



BCR Plastics SA



Two grades of graphene powder

Properties	heXo-G V4	heXo-G V20	
Average thickness	4-6	20	nm
Average flake size	3	50	μm
Bulk density	0.13	0.24	g/cm ³

Content

Carbon Content	> 93	> 92	wt.%
Oxygen content	< 4	< 5	wt.%

Application & Benefits

Electrical Conductivity	**	***
Thermal Conductivity	***	***
Liquid dispersion	***	*
Mechanical strengthening	**	**
Moisture and oxygen barrier	***	**
Typical Applications	Coatings, antistatic and EMI shielding, sensors, thermal interface materials, UV resistance	Conductive/ESD composites, thermal conductivity, material strengthening, battery electrodes