

(19)



(11)

EP 3 710 734 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
18.12.2024 Bulletin 2024/51

(21) Application number: **18797308.6**

(22) Date of filing: **12.10.2018**

(51) International Patent Classification (IPC):
F16L 9/12^(2006.01) C08L 23/08^(2006.01)

(52) Cooperative Patent Classification (CPC):
(C-Sets available)
F16L 9/12; C08L 2203/18 (Cont.)

(86) International application number:
PCT/US2018/055672

(87) International publication number:
WO 2019/099131 (23.05.2019 Gazette 2019/21)

(54) **PE-RT PIPES AND PROCESSES FOR MAKING THE SAME**

PE-RT-ROHRE UND VERFAHREN ZUR HERSTELLUNG DAVON

TUYAUX PE-RT ET PROCÉDÉS DE FABRICATION DE CEUX-CI

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **17.11.2017 US 201762587531 P**

(43) Date of publication of application:
23.09.2020 Bulletin 2020/39

(73) Proprietor: **ExxonMobil Chemical Patents Inc. Baytown, TX 77520 (US)**

(72) Inventors:

- **WINESETT, Donald A. Houston, TX 77008 (US)**
- **PENG, Haiqing Sugar Land, TX 77479 (US)**
- **DOUFAS, Antonios K. Houston, TX 77019 (US)**

(74) Representative: **ExxonMobil Chemical Europe LLC IP Law Europe Hermeslaan 2 1831 Machelen (BE)**

(56) References cited:
WO-A2-2005/056657

- **DETLEF SCHRAMM ET AL: "PE-RT, A New Class of Polyethylene for Industrial Pipes", 25TH INTERNATIONAL CONFERENCE ON OFFSHORE MECHANICS AND ARCTIC ENGINEERING, vol. 2006, 4 June 2006 (2006-06-04), pages 513 - 521, XP055359782, ISBN: 978-0-7918-4748-0, DOI: 10.1115/OMAE2006-92266**
- **HOLGER BRUENING ET AL: "Polyethylene used in industrial applications at elevated temperatures", APPLIED SOFT COMPUTING, 14 September 2016 (2016-09-14), AMSTERDAM, NL, pages 1 - 11, XP055546556, ISSN: 1568-4946**
- **J. CASTILLO MONTES ET AL: "Ageing of polyethylene at raised temperature in contact with chlorinated sanitary hot water. Part I - Chemical aspects", POLYMER DEGRADATION AND STABILITY, vol. 97, no. 2, 26 November 2011 (2011-11-26), GB, pages 149 - 157, XP055546589, ISSN: 0141-3910, DOI: 10.1016/j.polyimdegradstab.2011.11.007**

Remarks:

The file contains technical information submitted after the application was filed and not included in this specification

EP 3 710 734 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

(52) Cooperative Patent Classification (CPC): (Cont.)

C-Sets

C08F 10/02, C08F 2500/12, C08F 2500/13,

C08F 2500/38

Description

FIELD OF THE INVENTION

5 **[0001]** The present invention generally relates to PE-RT pipes, and more specifically to PE-RT pipe made from polyethylene compositions, and processes for making the same.

BACKGROUND OF THE INVENTION

10 **[0002]** Polyethylene of raised temperature resistance ("PE-RT") is a class of polyethylene resins suitable for use in domestic hot and cold water piping systems such as underfloor heating and radiator connections. PE-RT resins have a molecular structure and crystalline microstructure which can provide long term hydrostatic strength at high temperature, without the need for cross-linking. PE-RT resins can be used in applications where temperatures otherwise limit the use of polyethylene ("PE") or where metallic materials will suffer from corrosion. Furthermore, the processing properties of a PE-RT resin makes it attractive for industrial applications.

15 **[0003]** For example, the PE-RT resin can be used in plastics to offer cost savings and provide other advantages such as high speed and flexible pipe production processes, and ease of installation for an application. Unlike other polyethylene ("PE"), random copolymer polypropylene ("PP-R"), polybutene ("PB") and to a lesser extent chlorinated PVC ("C-PVC"), each of which can be restricted by high temperature limitations, the versatility of PE-RT resins used at higher temperature make these polyethylene compositions useful over a wide range of applications, particularly, when temperature profiles can range from sub-ambient to beyond what is considered normal for a PE system.

20 **[0004]** WO 2005/056657 A2 discloses a polyethylene resin and a composition containing such resin which is particularly suitable for use in pipes.

25 **[0005]** Typical characteristics of a PE-RT resin include processability such as extrudability and maximizing pipe mechanical (short-term and long-term) properties. PE-RT pipes typically have small diameters, e.g., up to 20 mm, and are fabricated at relatively fast rates of production. A fast extrusion rate; however, can introduce finishing issues such as melt fracture and result in poor surface finish. Further, increased extrusion rates can impact properties such as the smooth surface finish required by the International Standard Organization ("ISO") 22391-2.

30 **[0006]** Therefore, a need exists for a PE-RT pipes that provide advantages in processing of the pipe over conventional linear low density polyethylene resins, particularly, in terms of melt index and shear thinning characteristics which will lower extrusion pressures and extruder/die temperature to allow faster extrusion rates.

SUMMARY OF THE INVENTION

35 **[0007]** Provided herein are PE-RT pipes comprising a polyethylene composition of linear low density polyethylene (LLDPE) as described in attached claims 1-11.

[0008] [Deleted]

[0009] [Deleted]

[0010] The invention also provides for a process to produce the PE-RT pipe as described herein.

40 **[0011]** The invention further provides for an assembly comprising the PE-RT pipe as described herein. The assembly may comprises two or more PE-RT pipes in fluid communication.

BRIEF DESCRIPTION OF THE DRAWINGS

45 **[0012]**

FIG. 1 is an ISO 22391-2 graph that represents the expected strength of PE-RT Type I pipes where X1 time, t, to fracture is expressed in hours, X2 time, t to fracture is expressed in years and Y, hoop stress is expressed in megapascal.

50 FIG. 2 is a graph representing the data of Example 1 described herein and that plots tensile strength of the polyethylene compositions against the strain rate.

FIG. 3 is a graph that shows the results of small amplitude oscillatory shear rheology (viscosity at angular frequency) of Comparative 2, Reference 1, and Reference 2 polyethylene compositions as well as a control Comparative 1.

55 FIG. 4 is a graph that shows the results of capillary rheology (viscosity at 190°C) acquired for polyethylene compositions: Comparative 1, Comparative 2, Reference 1 and Reference 2.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0013] [Deleted]

[0014] As used herein, the term "metallocene catalyst" refers to a catalyst having at least one transition metal compound containing one or more substituted or unsubstituted cyclopentadienyl moiety ("Cp") (typically two Cp moieties) in combination with a Group 4, 5, or 6 transition metal (M). As used herein, all reference to the Periodic Table of the Elements and groups thereof is to the NEW NOTATION published in HAWLEY'S CONDENSED CHEMICAL DICTIONARY, Thirteenth Edition, John Wiley & Sons, Inc., (1997), unless reference is made to the Previous IUPAC form denoted with Roman numerals (also appearing in the same), or unless otherwise noted. A metallocene catalyst is considered a single site catalyst. Metallocene catalysts generally require activation with a suitable co-catalyst, or activator, in order to yield an "active metallocene catalyst", i.e., an organometallic complex with a vacant coordination site that can coordinate, insert, and polymerize olefins. Active catalyst systems generally include not only the metallocene complex, but also an activator, such as an alumoxane or a derivative thereof (preferably methyl alumoxane), an ionizing activator, a Lewis acid, or a combination thereof. Alkylalumoxanes (typically methyl alumoxane and modified methylalumoxanes) are particularly suitable as catalyst activators. The catalyst system can be supported on a carrier, typically an inorganic oxide or chloride or a resinous material such as, for example, polyethylene or silica.

[0015] The term linear medium density polyethylene ("MDPE") refers to a polyethylene copolymer having a density from about 0.930 g/cm³ to about 0.950 g/cm³. Polymers having more than two types of monomers, such as terpolymers, are also included within the term "copolymer."

[0016] The composition distribution breadth index ("CDBI") refers to the weight percent of the copolymer molecules having a comonomer content within 50% of the median total molar comonomer content. The CDBI of any copolymer is determined utilizing known techniques for isolating individual fractions of a sample of the copolymer. Temperature Rising Elution Fraction (TREF) is described in Wild, et al., J. Poly. Sci., Poly. Phys. Ed., Vol. 20, pg. 441 (1982) as well as in U.S. Pat. No. 5,008,204.

[0017] As used herein, the shear thinning ratio refers to the complex viscosity at 190°C at 0.01 rad/s over the complex viscosity at 190°C at 100 rad/s (or the nearest point).

[0018] Molecular weight distribution ("MWD") is equivalent to the expression Mw/Mn. The expression Mw/Mn is the ratio of the weight average molecular weight ("Mw") to the number average molecular weight ("Mn"). The weight average molecular weight is given by

$$M_w = \frac{\sum_i n_i M_i^2}{\sum_i n_i M_i}$$

the number average molecular weight is given by

$$M_n = \frac{\sum_i n_i M_i}{\sum_i n_i}$$

the z-average molecular weight is given by

$$M_z = \frac{\sum_i n_i M_i^3}{\sum_i n_i M_i^2}$$

where n_i in the foregoing equations is the number fraction of molecules of molecular weight M_i . Measurements of Mw, Mz, and Mn are typically determined by Gel Permeation Chromatography as disclosed in Macromolecules, Vol. 34, No. 19, pg. 6812 (2001). The measurements proceed as follows. Gel Permeation Chromatography (Agilent PL-220), equipped with three in-line detectors, a differential refractive index detector (DRI), a light scattering (LS) detector, and a viscometer, is

EP 3 710 734 B1

used. Experimental details, including detector calibration, are described in: T. Sun, P. Brant, R. R. Chance, and W. W. Graessley, *Macromolecules*, Volume 34, Number 19, pp. 6812-6820, (2001). Three Agilent PLgel 10 μ m Mixed-B LS columns are used. The nominal flow rate is 0.5 mL/min, and the nominal injection volume is 300 μ L. The various transfer lines, columns, viscometer and differential refractometer (the DRI detector) are contained in an oven maintained at 145°C.

Solvent for the experiment is prepared by dissolving 6 grams of butylated hydroxy toluene as an antioxidant in 4 liters of Aldrich reagent grade 1,2,4-trichlorobenzene (TCB). The TCB mixture is then filtered through a 0.1 μ m Teflon filter. The TCB is then degassed with an online degasser before entering the GPC-3D. Polymer solutions are prepared by placing dry polymer in a glass container, adding the desired amount of TCB, then heating the mixture at 160°C with continuous shaking for about 2 hours. All quantities are measured gravimetrically. The TCB densities used to express the polymer concentration in mass/volume units are 1.463 g/ml at about 21°C and 1.284 g/ml at 145°C. The injection concentration is from 0.5 to 2.0 mg/ml, with lower concentrations being used for higher molecular weight samples. Prior to running each sample, the DRI detector and the viscometer are purged. The flow rate in the apparatus is then increased to 0.5 ml/minute, and the DRI is allowed to stabilize for 8 hours before injecting the first sample. The LS laser is turned on at least 1 to 1.5 hours before running the samples. The concentration, c , at each point in the chromatogram is calculated from the baseline-subtracted DRI signal, I_{DRI} , using the following equation:

$$c = K_{DRI} I_{DRI} / (dn/dc),$$

where K_{DRI} is a constant determined by calibrating the DRI, and (dn/dc) is the refractive index increment for the system. The refractive index, $n = 1.500$ for TCB at 145°C and $\lambda = 690$ nm. Units on parameters throughout this description of the GPC-3D method are such that concentration is expressed in g/cm³, molecular weight is expressed in g/mole, and intrinsic viscosity is expressed in dL/g.

[0019] The LS detector is a Wyatt Technology High Temperature DAWN HELEOS. The molecular weight, M , at each point in the chromatogram is determined by analyzing the LS output using the Zimm model for static light scattering (M.B. Huglin, *LIGHT SCATTERING FROM POLYMER SOLUTIONS*, Academic Press, 1971):

$$\frac{K_o c}{\Delta R(\theta)} = \frac{1}{MP(\theta)} + 2A_2 c$$

Here, $\Delta R(\theta)$ is the measured excess Rayleigh scattering intensity at scattering angle θ , c is the polymer concentration determined from the DRI analysis, A_2 is the second virial coefficient. $P(\theta)$ is the form factor for a monodisperse random coil, and K_o is the optical constant for the system:

$$K_o = \frac{4\pi^2 n^2 (dn/dc)^2}{\lambda^4 N_A},$$

where N_A is Avogadro's number, and (dn/dc) is the refractive index increment for the system, which take the same value as the one obtained from DRI method. The refractive index, $n = 1.500$ for TCB at 145°C and $\lambda = 657$ nm.

[0020] A high temperature Viscotek Corporation viscometer, which has four capillaries arranged in a Wheatstone bridge configuration with two pressure transducers, is used to determine specific viscosity. One transducer measures the total pressure drop across the detector, and the other, positioned between the two sides of the bridge, measures a differential pressure. The specific viscosity, η_s , for the solution flowing through the viscometer is calculated from their outputs. The intrinsic viscosity, $[\eta]$, at each point in the chromatogram is calculated from the following equation:

$$\eta_s = c[\eta] + 0.3(c[\eta])^2,$$

where c is concentration and was determined from the DRI output.

[0021] The branching index (g'_{vis}) is calculated using the output of the GPC-DRI-LS-VIS method as follows. The average intrinsic viscosity, $[\eta]_{avg}$ of the sample is calculated by:

$$[\eta]_{avg} = \frac{\sum c_i [\eta]_i}{\sum c_i},$$

where the summations are over the chromatographic slices, i , between the integration limits.

[0022] The branching index g'_{vis} is defined as:

$$g'_{vis} = \frac{[\eta]_{avg}}{kM_v^\alpha}$$

M_v is the viscosity-average molecular weight based on molecular weights determined by LS analysis. Z average branching index (g'_{Zave}) is calculated using C_i = polymer concentration in the slice i in the polymer peak times the mass of the slice squared, M_i^2 . All molecular weights are weight average unless otherwise noted. All molecular weights are reported in g/mol unless otherwise noted. This method is the preferred method of measurement and used in the examples and throughout the disclosures unless otherwise specified. *See also, for background*, *Macromolecules*, Vol. 34, No. 19, Effect of Short Chain Branching on the Coil Dimensions of Polyolefins in Dilute Solution, Sun et al., pg. 6812-6820 (2001).

[0023] In an extrusion process, viscosity is a measure of resistance to shearing flow. Shearing is the motion of a fluid, layer-by-layer, like a deck of cards. When polymers flow through straight tubes or channels, they are sheared and the resistance is expressed by the viscosity. The melt index ("MI") is the number of grams extruded in 10 minutes under the action of a standard load is an inverse measure of viscosity. A high melt index implies low viscosity and low melt index means high viscosity. In addition, polymers are shear thinning, which means that their resistance to flow decreases as the shear rate increases. This is due to molecular alignments in the direction of flow and disentanglements.

[0024] Extensional or elongational viscosity is the resistance to stretching. In fiber spinning, in film blowing and other process where molten polymers are stretched, the elongational viscosity plays a role. For example, for certain liquids, the resistance to stretching can be three times larger than in shearing. For some polymeric liquids, the elongational viscosity can increase (tension stiffening) with the rate, although the shear viscosity decreased.

[0025] Melt strength is a measure of the extensional viscosity and is defined as the maximum tension that can be applied to the melt without breaking. Extensional viscosity is the polymer's ability to resist thinning at high draw rates and high draw ratios. In melt processing of polyolefins, the melt strength is defined by two key characteristics that can be quantified in process related terms and in rheological terms. In extrusion blow molding and melt phase thermoforming, a branched polyolefin of the appropriate molecule weight can support the weight of the fully melted sheet or extruded parison prior to the forming stage. This behavior is sometimes referred to sag resistance.

[0026] When LLDPE are extended in the melt phase, because of the lack of long chain branching, the chains align and tend to slide over one another. There is a momentary point where they begin to exhibit an increase in viscosity that is immediately flowed by the onset of shear thinning. The melt will thin out from specific points where the critical draw rate or draw ratio has been exceeded. So, while a lower elongational viscosity permits the LLDPE to be easily down gaged since there is no strong tension stiffening, the low elongational viscosity and melt strength is often bad for formation of larger diameter PE-RT pipes.

[0027] Therefore, as provided herein, the present PE-RT resins/polyethylene compositions can improve melt strength and shear thinning which can lower extrusion pressure and melt temperature to allow for faster extrusion rates. Through use of the polyethylene compositions described herein, the PE-RT pipes can be produced at relatively fast extrusion rates without many of the finishing issues typically associated with the conventional processing of PE-RT pipe.

[0028] As described herein, the polyethylene composition comprises from about 50.0 mole% to 100.0 mole% of units derived from ethylene. The lower limit on the range of ethylene content can be from 50.0 mole%, 75.0 mole%, 80.0 mole%, 85.0 mole%, 90.0 mole%, 92.0 mole%, 94.0 mole%, 95.0 mole%, 96.0 mole%, 97.0 mole%, 98.0 mole%, or 99.0 mole% based on the mole% of polymer units derived from ethylene. The polyethylene composition can have an upper limit on the range of ethylene content of 80.0 mole%, 85.0 mole%, 90.0 mole%, 92.0 mole%, 94.0 mole%, 95.0 mole%, 96.0 mole%, 97.0 mole%, 98.0 mole%, 99.0 mole%, 99.5 mole%, or 100.0 mole%, based on polymer units derived from ethylene.

[0029] Comonomer content is based on the total content of all monomers in the polymer. The polyethylene copolymer has minimal long chain branching (i.e., less than 1.0 long-chain branch/1000 carbon atoms, preferably particularly 0.05 to 0.50 long-chain branch/1000 carbon atoms). Such values are characteristic of a linear structure that is consistent with a branching index (as defined below) of $g'_{vis} \geq 0.980, 0.985, \geq 0.99, \geq 0.995, \text{ or } 1.0$. While such values are indicative of little to no long chain branching, some long chain branches can be present (i.e., less than 1.0 long-chain branch/1000 carbon atoms, preferably less than 0.5 long-chain branch/1000 carbon atoms, particularly 0.05 to 0.50 long-chain branch/1000 carbon atoms).

[0030] In another class of embodiments, the polyethylene compositions provided herein are ethylene-based copolymers having about 99.0 to about 80.0 wt%, 99.0 to 85.0 wt%, 99.0 to 87.5 wt%, 99.0 to 90.0 wt%, 99.0 to 92.5 wt%, 99.0 to 95.0 wt%, or 99.0 to 97.0 wt%, of polymer units derived from ethylene and about 1.0 to about 20.0 wt%, 1.0 to 15.0 wt%, 1.0 to 12.5 wt%, 1.0 to 10.0 wt%, 1.0 to 7.5 wt%, 1.0 to 5.0 wt%, or 1.0 to 3.0 wt% of polymer units derived from one or more C_3 to C_{20} α -olefin comonomers, preferably C_3 to C_{10} α -olefins, and more preferably C_4 to C_8 α -olefins. The α -olefin comonomer can be linear, branched, cyclic and/or substituted, and two or more comonomers can be used, if desired. Examples of suitable comonomers include of propylene, butene, 1-pentene; 1-pentene with one or more methyl, ethyl, or propyl

substituents; 1-hexene; 1-hexene with one or more methyl, ethyl, or propyl substituents; 1-heptene; 1-heptene with one or more methyl, ethyl, or propyl substituents; 1-octene; 1-octene with one or more methyl, ethyl, or propyl substituents; 1-nonene; 1-nonene with one or more methyl, ethyl, or propyl substituents; ethyl, methyl, or dimethyl-substituted 1-decene; 1-dodecene. Particularly suitable comonomers include 1-butene, 1-hexene, and 1-octene, 1-hexene, and mixtures thereof.

[0031] In some compositions, the polyethylene composition comprises from about 8 wt% to about 15 wt%, of C₃-C₁₀ α-olefin derived units, and from about 92 wt% to about 85 wt% ethylene derived units, based upon the total weight of the copolymer.

[0032] In other compositions, the polyethylene composition comprises from about 9 wt% to about 12 wt%, of C₃-C₁₀ α-olefin derived units, and from about 91 wt% to about 88 wt% ethylene derived units, based upon the total weight of the polymer for example.

[0033] The polyethylene compositions have a melt index (MI), I_{2.16} or simply I₂ for shorthand according to ASTM D1238, condition E (190°C/2.16 kg) reported in grams per 10 minutes (g/10 min), of ≥ about 0.10 g/10 min, e.g., ≥ about 0.15 g/10 min, ≥ about 0.18 g/10 min, ≥ about 0.20 g/10 min, ≥ about 0.22 g/10 min, ≥ about 0.25 g/10 min, ≥ about 0.28, or ≥ about 0.30 g/10 min. Additionally, the second polyethylene polymers can have a melt index (I_{2.16}) ≤ about 3.0 g/10 min, ≤ about 2.0 g/10 min, ≤ about 1.5 g/10 min, ≤ about 1.0 g/10 min, ≤ about 0.75 g/10 min, ≤ about 0.50 g/10 min, ≤ about 0.40 g/10 min, ≤ about 0.30 g/10 min, ≤ about 0.25 g/10 min, ≤ about 0.22 g/10 min, ≤ about 0.20 g/10 min, ≤ about 0.18 g/10 min, or ≤ about 0.15 g/10 min. Ranges expressly disclosed include, but are not limited to, ranges formed by combinations any of the above-enumerated values, e.g., from about 0.1 to about 5.0, about 0.2 to about 2.0, about 0.2 to about 0.5 g/10 min, etc.

[0034] The polyethylene compositions also have High Load Melt Index (HLMI), I_{21.6} or I₂₁ for shorthand, measured in accordance with ASTM D-1238, condition F (190°C/21.6 kg). For a given polymer having an MI and MIR as defined herein, the HLMI is fixed and can be calculated in accordance with the following paragraph.

[0035] The polyethylene compositions can have a Melt Index Ratio (MIR) which is a dimensionless number and is the ratio of the high load melt index to the melt index, or I_{21.6}/I_{2.16} as described above. The MIR of the second polyethylene polymers can be from 25 to 80, alternatively, from 25 to 70, alternatively, from about 30 to about 55, and alternatively, from about 35 to about 50.

[0036] The polyethylene compositions can have a density > 0.935 g/cm³, ≥ 0.940 g/cm³, ≥ 0.945 g/cm³, ≥ 0.950 g/cm³, ≥ 0.955 g/cm³. Alternatively, polyethylene compositions can have a density ≤ 0.960 g/cm³ ≤ 0.945 g/cm³, e.g., ≤ 0.940 g/cm³, ≤ 0.937 g/cm³, ≤ 0.935 g/cm³. Ranges expressly disclosed include, but are not limited to, ranges formed by combinations any of the above-enumerated values, e.g., from 0.9350 to 0.940 g/cm³, 0.935 to 0.950 g/cm³. Density is determined using chips cut from plaques compression molded in accordance with ASTM D-1928 Procedure C, aged in accordance with ASTM D-618 Procedure A, and measured as specified by ASTM D-1505.

[0037] The polyethylene compositions have a molecular weight distribution (MWD, defined as M_w/M_n) of 2 to 6, preferably 3.0 to 4.0.

[0038] The branching index, g'vis is inversely proportional to the amount of branching. Thus, lower values for g' indicate relatively higher amounts of branching. The amounts of short and long-chain branching each contribute to the branching index according to the formula: g' = g'_{LCB} × g'_{SCB}.

[0039] The polyethylene compositions have a g'vis of 0.85 to 0.99, particularly, 0.87 to 0.97, 0.89 to 0.97, 0.91 to 0.97, 0.93 to 0.95, or 0.97 to 0.99.

[0040] The polyethylene composition can be made by any suitable polymerization method including solution polymerization, slurry polymerization, supercritical, and/or gas phase polymerization using supported or unsupported catalyst systems, such as a system incorporating one or more metallocene catalysts.

[0041] Metallocene catalysts generally require activation with a suitable co-catalyst, or activator, in order to yield an "active metallocene catalyst", i.e., an organometallic complex with a vacant coordination site that can coordinate, insert, and polymerize olefins. Active catalyst systems generally include not only the metallocene complex, but also an activator, such as an alumoxane or a derivative thereof (preferably methyl alumoxane), an ionizing activator, a Lewis acid, or a combination thereof. Alkylalumoxanes (typically methyl alumoxane and modified methylalumoxanes) are particularly suitable as catalyst activators. The catalyst system can be supported on a carrier, typically an inorganic oxide or chloride or a resinous material such as, for example, polyethylene or silica.

[0042] Examples of useful metallocene catalysts/systems for producing polyethylene compositions desired herein include bridged and unbridged biscyclopentadienyl zirconium compounds (particular where the Cp rings are indenyl or fluorenyl groups). Non-limiting examples of metallocene catalysts and catalyst systems include those disclosed in WO 96/11961 and WO 96/11960, and in U.S. Patent Nos. 4,808,561; 5,017,714; 5,055,438; 5,064,802; 5,124,418; 5,153,157, and 5,324,800. Additional examples include the catalysts and catalyst systems described in U.S. Patent Nos. 6,380,122 and 6,376,410, and WO 01/98409.

[0043] Zirconium transition metal metallocene-type catalyst systems are particularly suitable. Non-limiting examples of metallocene catalysts and catalyst systems useful to make the present polyethylene compositions described herein include those described in, U.S. Patent Nos. 5,466,649; 6,476,171; 6,225,426; and 7,951,873, and in the references cited

therein. Particularly useful catalyst systems include supported dimethylsilyl bis(tetrahydroindenyl) zirconium dichloride.

[0044] Supported polymerization catalyst can be deposited on, bonded to, contacted with, or incorporated within, disposed on, adsorbed or absorbed in, or on, a support or carrier. In another embodiment, the metallocene is introduced onto a support by slurring a presupported activator in oil, a hydrocarbon such as pentane, solvent, or non-solvent, then adding the metallocene as a solid while stirring. The metallocene can be finely divided solids. Although the metallocene is typically of very low solubility in the diluting medium, it is found to distribute onto the support and be active for polymerization. Very low solubilizing media such as mineral oil (e.g., Kaydo™ or Drakol™) or pentane can be used. The diluent can be filtered off and the remaining solid shows polymerization capability much as would be expected if the catalyst had been prepared by traditional methods such as contacting the catalyst with methylalumoxane in toluene, contacting with the support, followed by removal of the solvent. If the diluent is volatile, such as pentane, it can be removed under vacuum or by nitrogen purge to afford an active catalyst. The mixing time can be greater than 4 hours, but shorter times are suitable.

[0045] In a gas phase polymerization process, a continuous cycle is employed where in one part of the cycle of a reactor, a cycling gas stream, otherwise known as a recycle stream or fluidizing medium, is heated in the reactor by the heat of polymerization. This heat is removed in another part of the cycle by a cooling system external to the reactor. (See e.g., U.S. Patent Nos. 4,543,399; 4,588,790; 5,028,670; 5,317,036; 5,352,749; 5,405,922; 5,436,304; 5,453,471; 5,462,999; 5,616,661; and 5,668,228.) To obtain the copolymers, individual flow rates of ethylene, comonomer, and hydrogen should be controlled and adjusted to obtain the desired polymer properties.

[0046] Suitable commercial polyethylene compositions are available from ExxonMobil Chemical Company, Houston, TX, as ENABLE® metallocene polyethylene resins ("ENABLE® mPE" or "ENABLE®") polyethylene compositions (resins) as described below. ENABLE® mPE polyethylene compositions offer an excellent balance between processability and mechanical properties, including tensile strength and elongation to break that leads to highpressure PE-RT pipe with advanced drawdown and enhanced pipe rupture (failure) time and toughness. For example, ENABLE 3505 HH is a medium density metallocene ethylene-hexene copolymer including a processing aid additive, a thermal stabilizer additive, and having a density of about 0.935 g/cm³ and melt index 190°C/kg of about 0.5 g/10 min. Applications for ENABLE products include but are not limited to food packaging, form fill, and seal packaging, heavy duty bags, lamination film, stand up pouches, multilayer packaging film, and shrink film.

[0047] Likewise, ENABLE MC is yet another medium density metallocene ethylene-hexene copolymer including a processing aid additive, a thermal stabilizer, and having density of about 0.935 g/cm³ and melt index 190°C/2.16 kg of about 0.5 g/10 min. It is useful in food packaging, form fill and seal packaging, heavy duty bags, lamination film, stand-up pouches, multilayer packaging film, and shrink film.

[0048] The polyethylene compositions and end-use application of PE-RT pipe as described herein comprise a linear low density polyethylene ("LLDPE") copolymer having at least 50 percent ethylene and at least one α -olefin co-monomer. The co-monomer can have from 3 to about 20 carbon atoms. The polyethylene composition can have a composition distribution breadth index ("CDBI") of at least 70% and a melt index ("MI") as measured at 190°C and 2.16 kg from about 0.1 to about 15 g/10 min. The polyethylene composition has a molecular weight distribution ("MWD") from about 2 to about 6.

[0049] As described herein, the polyethylene composition includes LLDPE which is a copolymer of ethylene and at least one other alpha-olefin (" α -olefin"). Co-monomers useful for making LLDPE copolymers include alpha-olefins, such as C₃-C₂₀ alpha-olefins, preferably C₃-C₁₀ alpha-olefins, and more preferably C₃-C₈ alpha-olefins. The alpha-olefin co-monomer can be linear or branched, and two or more comonomers can be used, if desired. The comonomers include propylene, butene, 1-pentene; 1-pentene with one or more methyl, ethyl, or propyl substituents; 1-hexene; 1-hexene with one or more methyl, ethyl, or propyl substituents; 1-heptene; 1-heptene with one or more methyl, ethyl, or propyl substituents; 1-octene; 1-octene with one or more methyl, ethyl, or propyl substituents; 1-nonene; 1-nonene with one or more methyl, ethyl, or propyl substituents; ethyl, methyl, or dimethyl-substituted 1-decene; 1-dodecene.

[0050] Specifically, but without limitation, the combinations of ethylene with co-monomer can include: ethylene propylene, ethylene butene, ethylene 1-pentene; ethylene 4-methyl-1-pentene; ethylene 1-hexene; ethylene 1-octene; ethylene decene; ethylene dodecene; ethylene 1-hexene 1-pentene; ethylene 1-hexene 4-methyl-1-pentene; ethylene 1-hexene 1-octene; ethylene 1-hexene decene; ethylene 1-hexene dodecene; ethylene 1-octene 1-pentene; ethylene 1-octene 4-methyl-1-pentene; ethylene 1-octene 1-hexene; ethylene 1-octene decene; ethylene 1-octene dodecene; combinations thereof and like permutations.

[0051] Generally, LLDPE copolymers can be obtained via a continuous gas phase polymerization using supported catalyst comprising an activated molecularly discrete catalyst in the substantial absence of an aluminum alkyl based scavenger (e.g., triethylaluminum (TEAL), trimethylaluminum (TMAL), triisobutyl aluminum (TIBAL), tri-n-hexylaluminum (TNHAL), and the like).

[0052] Representative LLDPEs produced using these catalysts generally each have a melt index of from 0.1 to 15 g/10 min, a CDBI of at least 70%, a density from 0.910 to 0.945 g/ml, a haze value of less than 20%, a melt index ratio (MIR), I_{21.6}/I_{2.16}, from 25 to 70. While prior art processes and polymers can be similar, none describe LLDPE copolymers having

good shear thinning and therefore relatively favorable extrusion and other melt processing properties with a high stiffness and high impact strength for use as a PE-RT pipe. For example, in comparison to LDPE (low density polyethylene) made in a high pressure polymerization process and having a comparable density and MI, the LLDPE copolymer used in the present PE-RT pipe have a favorable processability/mechanical properties balance for PE-RT pipe applications. Likewise, in comparison with LLDPE copolymer made by a gas phase process using conventional Ziegler-Natta supported catalysts, the present polyethylene copolymers have improved shear thinning characteristics.

[0053] LLDPE copolymers can have a composition distribution breadth index of at least 70%, a melt index $I_{2.16}$ from about 0.3 to about 2.0 g/10 min, a melt index ratio, $I_{2.16}/I_{2.16}$, of from about 25 to about 50, a molecular weight distribution by GPC from about 2.5 to about 5.5, and a density from about 0.915 to about 0.940. The LLDPE copolymers can be combined with at least one additional polymer that is a high density polyethylene, a linear low density polyethylene, a low density polyethylene, a medium density polyethylene, a differentiated polyethylene, or combinations thereof. The LLDPE copolymers can also be combined with at least one additional polymer that is a very low density polyethylene, an ethylene- or propylene-based polymer, a polymer derived from one or more dienes, and/or combinations thereof.

[0054] As to the reactor process conditions used to produce polyethylene, the overall conditions are described in U.S. Patent No. 5,763,543 can be used. A combination of process conditions can be beneficial in making the LLDPE copolymers described herein. For example, it is advantageous to use a catalyst system in which the metallocene has a pair of bridged cyclopentadienyl groups, preferably with the bridge consisting of a single carbon, germanium or silicon atom to provide an open site on the catalytically active cation. The activator can be methyl alumoxane as described in U.S. Patent Nos. 5,324,800; 5,580,939; and 5,633,394, or a non-coordinated anion as described in U.S. Application No. 08/133,480. Additionally, there should be substantially no scavengers which can interfere with the reaction between the vinyl end unsaturation of polymers formed and the open active site on the cation. By the statement "substantially no scavengers" and "substantially devoid or free of Lewis acid scavengers", it is meant that there should be less than 100 ppm by weight of such scavengers present in the feed gas, or preferably, no intentionally added scavenger, such as, for example, an aluminum alkyl scavenger, other than that which can be present on the support.

[0055] Conditions for the production of the LLDPE copolymers can include steady state polymerization conditions which are not likely to be provided by batch reactions in which the amount of catalyst poisons can vary and where the concentration of the comonomer can vary in the production of the batch.

[0056] The overall continuous gas phase processes for the polymerization of the LLDPE compositions herein can therefore comprise: (1) continuously circulating a feed gas stream containing monomer and inerts to thereby fluidize and agitate a bed of polymer particles; (2) adding metallocene catalyst to the bed; and (3) removing polymer particles, in which: a) the catalyst comprises at least one bridged bis cyclopentadienyl transition metal and an alumoxane activator on a common or separate porous support; b) the feed gas is substantially devoid of a Lewis acidic scavenger and wherein any Lewis acidic scavenger is preferably present in an amount less than 100 ppm by weight of the feed gas; c) the temperature in the bed is no more than 20°C less than the polymer melting temperature as determined by DSC, at a ethylene partial pressure in excess of 60 pounds per square inch absolute (414 kPaa); and d) the removed polymer particles have an ash content of transition metal of less than 500 ppm by weight, an MI less than 10, an MIR at least 35, and substantially no detectable chain end unsaturation as determined by HNMR.

[0057] By the statement that the polymer has substantially no detectable end chain unsaturation, it is meant that the polymer has vinyl unsaturation of less than 0.1 vinyl groups per 1000 carbon atoms in the polymer, preferably less than 0.05 vinyl groups per 1000 carbon atoms, and more preferably 0.01 vinyl groups per 1000 carbon atoms or less.

[0058] The processes described above can provide LLDPE copolymer via the use of a single catalyst, and the processes do not depend on the interaction of bridged and unbridged species. Preferably, the catalyst is substantially devoid of a metallocene having a pair of pi-bonded ligands (e.g., cyclopentadienyl compounds) which are not connected through a covalent bridge. In other words, no such metallocene is intentionally added to the catalyst or, preferably, no such metallocene can be identified in such catalyst. Additionally, the processes use substantially a single metallocene species comprising a pair of pi-bonded ligands, at least one of which has a structure with at least two cyclic fused rings (e.g., indenyl rings). Best results can be obtained by using a substantially single metallocene species comprising a monoatom silicon bridge connecting two polynuclear pi-bonded ligands to the transition metal atom.

[0059] The catalyst is preferably supported on silica with the catalyst homogeneously distributed in the silica pores. Preferably, fairly small amounts of methyl alumoxane should be used, such as amounts giving an Al to transition metal ratio of from 400 to 30, and especially of from 200 to 50.

[0060] In order to obtain a desired melt index ratio (i.e., 40 to 50), both the molar ratio of ethylene and comonomer and the concentration of the comonomer can be varied. Control of the temperature can help control the MI. Overall monomer partial pressures can be used which correspond to conventional practice for gas phase polymerization of LLDPE.

[0061] The above-described processes can be tailored to achieve desired polyethylene compositions. For example, comonomer to ethylene concentration or flow rate ratios are commonly used to control density. Similarly, hydrogen to ethylene concentrations or flow rate ratios are commonly used to control molecular weight. In both cases, higher levels of a modifier results in lower values of the respective resin parameter. Gas concentrations can be measured by, for example, an

on-line gas chromatograph or similar apparatus to ensure relatively constant composition of recycle gas streams. Optimization of these modifier ratios and the given reactor conditions can achieve a targeted melt index, density, and/or other resin properties.

[0062] As provided herein, the present polyethylene compositions are useful as pipe made of polyethylene of raised temperature ("PE-RT") or for PE-RT pipe. Fabricated pipe using these PE-RT qualified resins (referred to herein as "polyethylene compositions") must meet a range of performance specifications depending on the end use of the pipe and geographically specific regulations. The PE-RT specifications are provided in ISO 22391-2 which specify the pipe characteristics necessary for hot and cold water handling within building construction applications. The primary mechanical specification of ISO 22391-1 is the pipe's resistance to bursting under hydrodynamic (hoop) stress at various temperatures and times. In addition to long term burst resistance, a key resin characteristic is extrudability (extruder processability) since these pipes are typically small diameter (up to 20 mm) fabricated at relatively fast extrusion rates which can introduce finishing issues such as melt fracture resulting in a poor surface finish and possibly impacting properties. As described below in detail, another requirement of ISO 22391-2 is an unblemished, smooth surface finish.

15 EXAMPLES

[0063] It is to be understood that while the invention has been described in conjunction with the specific embodiments thereof, the foregoing description is intended to illustrate and not limit the scope of the invention. Other aspects, advantages and modifications will be apparent to those skilled in the art to which the invention pertains.

20 [0064] Therefore, the following examples are put forth so as to provide those skilled in the art with a complete disclosure and description and are not intended to limit the scope of that which the inventors regard as their invention.

Test Methods

25 **Pipe Made of Polyethylene of Raised Temperature Resistance (PE-RT)**

[0065] International Organization for Standardization (ISO) 22391-2 specifies the characteristics of pipe made of polyethylene of raised temperature resistance ("PE-RT"), Type I intended to be used for hot and cold water installations within buildings for the conveyance of water, whether or not the water is intended for human consumption (domestic systems), and for heating systems, under the design pressures and temperatures appropriate to the class of application according to ISO 22391-1.

Evaluation of σ_{LPL} Values

35 [0066] Pipe material as used herein refers to the material from which the pipe is made and means the polyethylene compositions described herein as polyethylene of raised temperature resistance ("PE-RT"). Pipe material is evaluated in accordance with ISO 9080 or equivalent, with internal pressure tests carried out in accordance with ISO 1167-1 and ISO 1167-2, to determine the σ_{LPL} values. The σ_{LPL} value is at least as high as the corresponding values of the reference curves given in FIG. 1 (taken from ISO 24033:2009) over the complete range of times. Alternatively, one equivalent way of evaluation is to calculate the σ_{LPL} value for each temperature individually.

40 [0067] The reference curves for PE-RT Type I in FIG. 1 in the temperature range of 10°C to 95°C are derived from Equations (1) and (2). First branch (i.e., the left-hand portion of the lines shown in FIG. 1):

45 (1)
$$\lg t = -190,481 - \frac{58\,291,035 \lg \sigma}{T} + \frac{78\,763,07}{T} + 119,877 \lg \sigma,$$

Second branch (i.e., the right-hand portion of the lines shown in FIG. 1):

50 (1)
$$\lg t = -27,795\,4 - \frac{1723,318 \lg \sigma}{T} + \frac{11\,150,56}{T}$$

[0068] The 110°C values are determined separately using water inside and air outside the test specimen and are not derived from Equations (1) and (2).

55 [0069] In order to demonstrate conformance to the reference lines, pipe samples should be tested in accordance with ISO 1167-1 and ISO 1167-2 at the following temperatures: 20°C; 60°C to 70°C; and 95°C, and at various hoop stresses such that, at each of the temperatures, at least three failure times fall in each of the following time intervals: 10 h to 100 h; 100 h to 1,000 h; 1,000 h to 8,760 h and over. In tests lasting more than 8,760 h without failure, any test time after 8,760 h can be considered as the failure time.

EP 3 710 734 B1

Geometrical Characteristics of Pipe

[0070] Dimensions are measured in accordance with ISO 3126. The maximum calculated pipe value, $S_{calc, max}$, for the applicable class of service condition and design pressure, p_D , are in accordance with Table 1 for PE-RT Type I. The values of outside diameter and wall thickness apply to the PE-RT pipe and, for design calculation purposes, are exclusive of any barrier layer thickness.

Table 1 - $S_{calc, max}$ Values for PE-RT Type I

p_D bar ^c	Application Class			
	1	2	3	4
	$S_{calc, max}$ values ^a			
4	6.7 ^b	6.7 ^b	6.7 ^b	6.0
6	5.5	4.5	5.4	4.0
8	4.1	3.4	4.1	3.0
10	3.3	2.7	3.3	2.4
a The values are rounded to the first decimal place. b The 20°C, 10 bar, 50 years, cold water requirement, being higher, determines this value (see ISO 22391-1:2009, Clause 4). c 1 bar = 0.1 MPa = 10 ⁵ Pa; 1 MPa = 1 N/mm ² .				

General Dimensions of Pipe

[0071] For corresponding pipe dimension class, the mean outside diameter, d_{em} of pipe is in accordance with Tables 2, 3, 4, and 5 below.

Wall Thicknesses and Tolerances

[0072] For any particular class of service condition, design pressure and nominal size, the minimum wall thickness, e_{min} , is such that the corresponding S series or S_{calc} value is less than or equal to the values of $S_{calc, max}$ given in Table 1. For the corresponding pipe dimension class, the wall thicknesses, e_{min} and e_n , is in accordance with Tables 2, 3, 4 or 5 as applicable, in respect of pipe series S or S_{calc} values. However, pipes joined together by fusion have a minimum wall thickness of 1.9 mm. The tolerance on the wall thickness, e , is in accordance with Table 6.

Table 2 - Pipe Dimensions for Dimension Class A (sizes in accordance with ISO 4065 and applicable for all classes of service condition)

Nominal Size DN/OD	Nominal Outside Diameter d_n	Mean Outside Diameter		Pipe Series			
				S 5	S 4	S 3.2	S 2.5
		$d_{em, min}$	$d_{em, max}$	Wall Thicknesses e_{min} and e_n			
12	12	12.0	12.3	1.3a	1.4	1.7	2.0
16	16	16.0	16.3	1.5	1.8	2.2	2.7
20	20	20.0	20.3	1.9	2.3	2.8	3.4
25	25	25.0	25.3	2.3	2.8	3.5	4.2
32	32	32.0	32.3	2.9	3.6	4.4	5.4
40	40	40.0	40.4	3.7	4.5	5.5	6.7
50	50	50.0	50.5	4.6	5.6	6.9	8.3
63	63	63.0	63.6	5.8	7.1	8.6	10.5
75	75	75.0	75.7	6.8	8.4	10.3	12.5
90	90	90.0	90.9	8.2	10.1	12.3	15.0
110	110	110.0	111.0	10.0	12.3	15.1	18.3
125	125	125.0	126.2	11.4	14.0	17.1	20.8

EP 3 710 734 B1

(continued)

5	Nominal Size DN/OD	Nominal Outside Diameter d_n	Mean Outside Diameter		Pipe Series			
					S 5	S 4	S 3.2	S 2.5
			$d_{em, min}$	$d_{em, max}$	Wall Thicknesses e_{min} and e_n			
	140	140	140.0	141.3	12.7	15.7	19.2	23.3
	160	160	160.0	161.5	14.6	17.9	21.9	26.6
10	a A non-preferred wall thickness of 1.1 mm is permitted for $d_n = 12$.							
	Dimensions in millimeters							

Table 3 - Pipe Dimensions for Dimension Class B1 (sizes based on copper pipe sizes and applicable for all classes of service condition)

15	Nominal Size DN/OD	Nominal Outside Diameter d_n	Mean Outside Diameter		Wall Thicknesses	
			$d_{em, mm}$	$d_{em, max}$	e_n	e_{min}
20	10	10	9.9	10.2	1.5 1.8	1.5 1.7
	12	12	11.9	12.2	1.5 2.0	1.5 1.9
25	15	15	14.9	15.2	1.5 2.5	1.5 2.4
	18	18	17.9	18.2	1.7 2.5	1.7 2.4
30	22	22	21.9	22.2	2.0 3.0	2.0 2.9
	28	28	27.9	28.2	2.6 4.0	2.6 3.9

Table 4 - Pipe Dimensions for Dimension Class B2

35	Nominal Size DN/OD	Nominal Outside Diameter D_n	Mean Outside Diameter		Wall Thicknesses e_{min} and e_n	S_{calc}
			$d_{em, min}$	$d_{em, max}$		
40	14.7	14.7	14.63	14.74	1.6	4.1
	21	21	20.98	21.09	2.05	4.6
	27.4	27.4	27.33	27.44	2.6	4.8
45	34	34	34.08	34.19	3.15	4.9
	Dimensions in millimeters					

Table 5 - Pipe Dimensions for Dimension Class C

50	Nominal Size DN/OD	Nominal Outside Diameter D_n	Mean Outside Diameter		Wall Thicknesses e_{min} and e_n	S_{calc}
			$d_{em, min}$	$d_{em, max}$		
	12	12	12.0	12.3	2.0	2.5
	14	14	14.0	14.3	2.0	3.0
55	15	15	150	15.3	2.0	3.2
	16	16	160	16.3	2.0	3.5
	17	17	170	17.3	2.0	3.8
	18	18	180	18.3	2.0	4.0

EP 3 710 734 B1

(continued)

Nominal Size DN/OD	Nominal Outside Diameter D_n	Mean Outside Diameter		Wall Thicknesses e_{min} and e_n	S_{calc}
		$d_{em, min}$	$d_{em, max}$		
20	20	20.0	20.3	2.0	4.5
Dimensions in millimeters					

Table 6 - Tolerances for Wall Thickness of PE-RT Type I Pipe

Minimum Wall Thickness e_{min}		Tolerance ^a X
>	≤	
1.0	2.0	0.3
2.0	3.0	0.4
3.0	4.0	0.5
4.0	5.0	0.6
5.0	6.0	0.7
6.0	7.0	0.8
7.0	8.0	0.9
8.0	9.0	1.0
9.0	10.0	1.1
10.0	11.0	1.2
11.0	12.0	1.3
12.0	13.0	1.4
13.0	14.0	1.5
14.0	15.0	1.6
15.0	16.0	1.7
16.0	17.0	1.8
17.0	18.0	1.9
18.0	19.0	2.0
19.0	20.0	2.1
20.0	21.0	2.2
21.0	22.0	2.3
^a The tolerance is expressed in the form $+x_0$ mm, where x is the value of the tolerance given. The level of the tolerances conforms to ISO 11922-1, Grade V.		
Dimensions are in millimeters.		
Dimensions are in millimeters.		

Mechanical Characteristics

[0073] Per the requirements of ISO 22391, the pipe is tested using the test methods and test parameters specified in Table 7.

EP 3 710 734 B1

Table 7 - Mechanical Characteristics of PE-RT Type I Pipe

Characteristic	Requirement	Test Parameters				Test Methods
		For Individual Tests				
Resistance to internal pressure	No failure during the test period	Hydrostatic (hoop) stress MPa	Test temperature °C	Test period h	Number of test pieces	ISO 1167-1 and ISO 1167-2
		9.9	20	1	3	
		3.8	95	22	3	
		3.6	95	165	3	
		3.4	95	1,000	3	
		For All Tests				
		Sampling procedure Type of end cap Orientation of test piece Type of test		Not Specified Type a) Not Specified Water-in-Waters		

Physical Characteristics

[0074] The pipe is tested using the test method and test parameters, and conforming to the requirements of ISO 22391 as specified in Table 8.

Table 8 - Physical Characteristics of PE-RT Pipe Type I

Characteristic	Requirement	Test Parameters		Test Methods
		Parameter	Value	
Longitudinal reversion	≤ 2%	Temperature	110°C	ISO 2505
		Duration of Exposure:		
		$e_n \leq 8$ mm	1 h	
		$8 \text{ mm} < e_n \leq 16$ mm	2h	
		$e_n > 16$ mm	4h	
		Number of test pieces	3	
Thermal stability by hydrostatic pressure testing	No bursting during test period	Sampling procedure	Not specified	ISO 1167-1 and ISO 1167-2
		End cap	Type a)	
		Orientation	Not specified	
		Type of test	Water-in-air	
		Hydrostatic (hoop) stress	Type I: 1.9 MPa Type II: 2.3 MPa	
		Test temperature	110°C	
		Test period	8,760h	
		Number of test pieces	1	
Melt mass flow rate (MFR)	30% maximum difference compared to compound	Mass	5 kg	ISO 1133-1
		Test temperature	190°C	
		Test period	10min	
		Number of test pieces	3	

EP 3 710 734 B1

Maximum Calculated Pipe Value $S_{\text{calc, max}}$

[0075] Principles for the calculation of the maximum calculated pipe value, $S_{\text{calc, max}}$ values are provided below. Hence the determination of minimum wall thickness, e_{min} of pipes, relative to the classes of service conditions (application class) in accordance with ISO 22391-1 Table 1 and the applicable design pressure, p_D .

Design Stress

[0076] The design stress, σ_D , for a particular class of service conditions (application class) is calculated using Equations (1) and (2), using Miner's rule in accordance with ISO 13760, and taking into account the applicable class requirements given above, and the service coefficients given in Table 9 below.

Table 9 - Overall Service (Design) Coefficients

Temperature °C	Overall service [design] coefficient C
T_D	1.5
T_{max}	1.3
T_{mal}	1.0
T_{cold}	1.25

[0077] The resulting design stress, σ_D , as provided in ISO 22391, is given in Table 10 below.

Table 10 - PE-RT Pipe Type I Design Stress

Application class	Design stress ^a σ_D MPa	Design stress ^a σ_D MPa
	PE-RT Type I	PE-RT Type II
1	3.29	3.53
2	2.68	3.37
4	3.25	3.38
5	2.38	2.88
20°C for 50 years	6.68	7.47
a Values are rounded to the second decimal place (i.e. the nearest 0.01 MPa).		

[0078] The derivation of the maximum value of S_{calc} , $S_{\text{calc, max}}$, is the smaller of the values obtained from Equations (A.1) and (A.2):

$$\frac{\sigma_{DP}}{PD} \quad \text{A.1 ,}$$

where

σ_{DP} is the design stress of the pipe material taken from Table A.2, in megapascal (MPa); and p_D is the design pressure of 4 bar, 6 bar, 8 bar or 10 bar, as applicable, expressed in megapascal (MPa):

$$\frac{\sigma_{\text{cold}}}{PD} \quad \text{A.2 ,}$$

where

σ_{cold} is the design stress at 20°C relative to a service life of 50 years (MPa); and p_D is the design pressure of 10 bar, expressed in megapascal (MPa).

[0079] The values of $S_{\text{calc, max}}$ relative to each class of service are given in Table 3.

[0080] The S series and S_{calc} values are chosen for each application class and design pressure from Tables 5, 6, 7 or 8,

EP 3 710 734 B1

as applicable, in such a way that S or S_{calc} is not greater than $S_{calc, max}$ given in Table 1 for PE-RT Type I.

EXAMPLE 1

5 **[0081]** Reactor granules from Comparative 2 (0.5MI, 0.927g/cc), Reference 1 (0.5MI, 0.935g/cc), and Reference 2 (0.2MI, 0.940g/cc) were mixed in a Coperion ZSK-57 twin screw extruder at 150 lbs/hr output rate with a standard antioxidant and metal deactivation additive package.

10 **[0082]** The density of the polyethylene composition referred to herein as Comparative 2 was .927 g/cm³ having a melt index of .5 g/10 min. The composition includes a processing aid additive and a thermal stabilizer additive and is used in applications such as blown film, collation shrink, food packaging, form fill and seal packaging, multilayer packaging film, heavy duty bags, shrink film, lamination film, and stand up pouches.

15 **[0083]** The density of the polyethylene composition referred to as Reference 2 was .940 g/cm³ having a melt index of 0.25 (190°C/2.16 kg). This composition includes a processing aid additive and a thermal stabilizer additive, and is used in applications such as collation shrink, lamination film, compression packaging, and multilayer packaging film.

Property Testing of the Polyethylene Composition

20 **[0084]** Flexural modulus, tensile modulus, environmental stress crack resistance ("ESCR"), notched constant ligament series ("NCLS"), and oxidative induction temperature ("OIT") were measured for each sample and compared to an industry standard for PE-RT type I referred to herein as Comparative 1. The physical and thermal properties of the polyethylene compositions are summarized in Table 11A and Table 11B below. In addition, FIG. 2 shows the results from tensile strength studies at various strain rates at an elevated (70°C) temperature acquired at Datapoint Labs.

Table 11A - Physical and Thermal Properties of Samples

Sample Descriptions	Flexural Modulus 1% SecMod (Mpa)	Tensile Stress at Yield (Mpa)	Tensile Strain at Yield (%)	Tensile Strength (Mpa)	Tensile Modulus 1%Sec (Mpa)
Comparative 2	571.0	150	11.8	36.7	544.0
Reference 1	796.0	19.0	10.9	38.4	759.0
Reference 2	916.0	21.0	107	42.2	884.0
Comparative 1	699.0	17.2	13.2	38.7	632.0

Table 11B - Additional Physical and Thermal Properties of Samples (continued)

Sample Descriptions	ESCR - Bent Strip (10% Igepal, cond B)	NCLS (10% Igepal, 50°C, 800 psi)	Oxidative Induction Time 210°C (min)	Onset of Thermal Degradation 210°C (min)	Oxidation Rate 210°C (mW/min)
Comparative 2	> 1000 hrs	> 1008 hrs	45.0	50.2	4.59
Reference 1	> 1000 hrs	692 hrs	44.3	50.6	4.05
Reference 2	> 1000 hrs	280 hrs	46.8	50.6	5.96
Comparative 1	> 1000 hrs	> 1008 hrs	68.0	80.2	1.57

40 **[0085]** At a higher strain rate, the strength of the polyethylene composition (sometimes referred to as a "resin") was dominated by its density and MI. When the strain rate is low, due to its poor comonomer distribution, the strength of the Comparative 1 deteriorates quickly. In summary, the physical characteristics of the Reference 1 and Reference 2 polyethylene compositions meet or exceed those of the Comparative 1 incumbent composition for most physical property tests. Furthermore, each of the four polyethylene composition grades were shown to meet the 40 minute minimum requirement for oxidative induction temperature at 210°C.

45 **[0086]** Small amplitude oscillatory shear ("SAOS") rheology and capillary rheology was acquired for the Comparative 2, Reference 1, and Reference 2 polyethylene compositions as well as the industry control Comparative 1 as shown in FIG. 3 and FIG. 4.

[0087] All measurements in small angle oscillatory shear have been conducted using TA Instruments advanced rheometric expansion system (ARES). Parallel plate fixtures of 25 mm were used for small-angle oscillatory shear measurements at 190°C and a frequency range 0.01-628 rad/s (add here actual frequency-range). All measurements

EP 3 710 734 B1

were made within the linear regime as confirmed from strain sweep experiments. After loading and every temperature change the samples have been equilibrated at constant temperature during approximately 30 minutes until normal forces were completely relaxed. In the course of the measurements, the sample has been kept under nitrogen protection to avoid thermal degradation.

5 **[0088]** From the complex viscosity response to angular frequency (shear rate) demonstrated in the figures, the polyethylene compositions advantageously demonstrate more shear thinning which for the 0.5MI Comparative 2 and Reference 1 polyethylene compositions lead to lower viscosity in typical extrusion conditions (~10 - 1000 s⁻¹) when compared to the Comparative 1. (FIG. 3). The melt viscosity of the 0.2MI Reference 2 indicated comparable viscosity to the Comparative 1 resin for the shear rates tested. (FIG. 3)

10 EXAMPLE 2

Property Tests - Fabricated Pipe

15 **[0089]** Pipe samples for strength testing were fabricated in their standard multi-layer pipe structure with 16mm outer diameter, 2 mm wall section, and an adhesive + EVOH barrier layer. Further, samples were fabricated with Comparative 2, Reference 1, and Reference 2 polyethylene compositions and compared to the incumbent benchmark composition, Comparative 1. Barrier composition was EVOH and process aid was used during fabrication.

20 **[0090]** Extrusion performance of Comparative 2 and Reference 1 polyethylene compositions were superior to the Comparative 1 polyethylene composition incumbent. Both Comparative 2 and Reference 1 polyethylene compositions processed through the line under standard extrusion rates of 17.6 m/min and were able to run at 22 m/min at still meet size and aesthetic requirements of quality control. Extrusion performance of Reference 2 polyethylene composition under standard control conditions was comparable to Comparative 1 which was less than optimal and deemed unsuitable. Both polyethylene compositions required polymer processing aid (PTFE based additive) to be added to eliminate drag marking.

25 Internal coil memory assessment of all fabricated pipes was similar and deemed acceptable. Fabricated pipes of the Reference 1, Reference 2, and Comparative 2 polyethylene compositions were noticeably whiter than Comparative 1, which exhibited dull yellow tinge.

30 **[0091]** PE-RT Pipe samples were submitted for long term hydrostatic pressure testing, and the results are summarized below in Table 12. Reference 1 and Reference 2 included a synthetic hydrocarbon viscosity modifier that improves coil memory, but that could reduce the time of failure and cause the pipe to hold less pressure.

Table 12 - PE-RT Pipe Performance

	20°C, 9.9 MPa	95°C, 3.8 MPa	95°C, 3.6 MPa	95°C, 3.4 MPa	110°C, 1.9MPa
Criteria	1 hr	22 hr	165 hr	1000 hr	8760 hr
Comparative 1	terminated at 1 hr	failed at 1.7, 3, 3.9 hrs	failed at 38,43,168 hrs	terminated at 1200 hrs	failed at 7547 and 8243 hrs
Comparative 2 (additive-1A)	Abandoned	abandoned	failed at 0.3,0.5,0.8 hrs	failed at 31,41,74hrs	abandoned
Reference 1 (additive-1A)	terminated at 1000 hrs	terminated at 1000 hrs	terminated at 1000 hrs	terminated at 1200 hrs	Terminated at 8760 hrs
Reference 2 (additive-1A)	terminated at 1000 hrs	terminated at 1000 hrs	terminated at 1000 hrs	terminated at 1200 hrs	Terminated at 8760 hrs
Reference 1 (additive-1B)	2 pieces failed at 310 hrs; 1 piece terminated at 1000 hrs	1 piece failed at 666 hrs; 2 pieces terminated at 1000 hrs	terminated at 1000 hrs	terminated at 1200 hrs	1 Terminated at 8760 hrs, 1 failed at 2995 hrs
Reference 2 (additive-1B)	terminated at 1000 hrs	terminated at 1000 hrs	terminated at 1000 hrs	terminated at 1200 hrs	Terminated at 8760 hrs
	Pipe pressure tests per ISO22391-2; Data Traceability EXOVA reports				

EP 3 710 734 B1

EXAMPLE 3

[0092] Pipe samples for strength testing were fabricated by using a pipe extruder with nominal 16mm outer diameter and 2 mm wall section.

5 **[0093]** Another PE-RT resin was produced for pipe extrusion and tests. It had a density of 0.935 g/cc and a MI of 0.5 g /10 min. PE-RT pipe samples were extruded by using an industrial pipe extruder. The nominal dimensions of the pipe samples were 20 mm outer diameter and 2 mm wall thickness. Various line speeds were tested from 10 to 40 meters per minutes against a commercial metallocene resin benchmark. Pipes were found to have good dimension and surface appearance.

10 **[0094]** Pipe samples were submitted for long term hydrostatic testing using DETERMINATION OF THE LONG-TERM HYDROSTATIC STRENGTH ISO 9080:2012ISO 9080 at 4 temperatures: 20, 70, 95 and 110°C. The pressure testing at 20, 70 and 95°C was performed using deionized water on the inside and on the outside of the pipe specimens. 110°C air is used on the outside. The accuracy temperature and pressure is better than ±1°C and +2/-1% respectively. The measurement of the wall thickness are accurate within ±0.02 mm and the diameter1 within ±0.1 mm.

15 **[0095]** Table 13 summarizes the results of the observations obtained from the tests of the 4 different temperatures. Table 14 summarizes distribution of stress rupture data.

Table 13

Temperature	Total	Burst	On test	Stopped	Longest time to burst (hrs)	Longest testing time (hrs)
20°C	56	23	26	7	8365	9431
70°C	59	22	29	8	6215	9431
95°C	54	28	18	8	6553	9431
110°C	51	18	27	6	2217	9431

Table 14 Distribution of stress rupture data

Temperature	Total	Burst	On test	Stopped	>7000 hrs	>9000 hrs
20°C	30	21	9	0	4	1
70°C	30	20	10	0	4	1
95°C	30	22	8	0	6	3
110°C	30	18	12	0	7	3

[0096] Table 15 summarizes the extrapolated strength values at t_e . By its LPL value of 9.69 MPa at 20°C and 50 years the natural PE-RT pipe grade, this material has a minimum required strength (MRS) classification of 8 MPa and is thereby designated PE-RT 80 according to ISO 12162:2009.

Table 15 Extrapolated strength

Temperature	t_e	t_e	σ_{LTHS}	σ_{LPL}
20°C	907,600 hrs	104 years	9.860 MPa	9.618 MPa
70°C	453,821 hrs	51.8 years	5.793 MPa	5.559 MPa
95°C	36,305 hrs	4.14 years	3.805 MPa	3.614 MPa
110°C	9,076 hrs	1.04 years	2.619 MPa	2.461 MPa

50 **[0097]** The resulting design hoop stresses of the Miner's rule calculations for a design time of 50 years are presented below. Table 16 lists the resulting design Hoop Stress and conformity check with the application classes.

Table 16 - Hoop Stress and conformity check with the application classes

APPLICATION CLASS [ISO 10508]	σ_{LPL}	ISO 22391 PE-RT type I	Results
1	3.89 MPa	3.29 MPa	Pass
2	3.71 MPa	2.68 MPa	Pass

(continued)

APPLICATION CLASS [ISO 10508]	σ LPL	ISO 22391 PE-RT type I	Results
4	3.68 MPa	3.25 MPa	Pass
5	3.18 Mpa	2.38 Mpa	Pass
Cold water (20°C, 50 yrs)	7.76 MPa	6.68 MPa	Pass

[0098] The phrases, unless otherwise specified, "consists essentially of" and "consisting essentially of" do not exclude the presence of other steps, elements, or materials, whether or not, specifically mentioned in this specification, so long as such steps, elements, or materials, do not affect the basic and novel characteristics of the invention, additionally, they do not exclude impurities and variances normally associated with the elements and materials used.

Claims

1. A PE-RT pipe made from a linear low density polyethylene (LLDPE) composition comprising at least 50 mole percent ethylene derived units and one or more alpha-olefin co-monomer derived units, wherein the polyethylene composition has a molecular weight distribution (M_w/M_n) of from 2 to 6, a long chain branching index g'_{vis} of from 0.85 to 0.99, a density of from 0.934 to 0.960 g/cm³, and a shear thinning ratio of 1.0 to 100, wherein the one or more alpha-olefin co-monomer derived units is derived from propylene, butene, 1-pentene; 1-pentene with one or more methyl, ethyl, or propyl substituents; 1-hexene; 1-hexene with one or more methyl, ethyl, or propyl substituents; 1-heptene; 1-heptene with one or more methyl, ethyl, or propyl substituents; 1-octene with one or more methyl, ethyl, or propyl substituents; 1-nonene; 1-nonene with one or more methyl, ethyl, or propyl substituents; ethyl, methyl, or dimethyl-substituted 1-decene; 1-dodecene; or a combination thereof and wherein the polyethylene composition has a tensile strength at 5% strain that satisfies the following relationship:

$$y > 6.1395 * x^{0.0579} + 0.2,$$

wherein y is the tensile strength (MPa) at 5% strain at 70 °C and x is the strain rate (s⁻¹).

2. The PE-RT pipe of claim 1, wherein the PE-RT pipe has at least a 16 mm external diameter, at least a 2 mm wall thickness and has a pipe rupture (failure) time at 95°C / 3.8 MPa of 500 hours or greater.
3. The PE-RT pipe of claim 1, wherein the PE-RT pipe has at least a 6 mm external diameter, at least a 2 mm wall thickness and has a pipe rupture (failure) time at 95°C / 3.4 MPa of 1,000 hours or greater.
4. The PE-RT pipe of claim 1, wherein the PE-RT pipe has at least a 16 mm external diameter, at least a 2 mm wall thickness and has a pipe rupture (failure) time at 110°C / 1.9 MPa of 8,760 hours or greater.
5. The PE-RT pipe of any one of the preceding claims, wherein the polyethylene composition has a melt index of from 0.1 g/10 min to 5 g/10 min.
6. The PE-RT pipe of any one of the preceding claims, wherein the polyethylene composition has a melt index ratio ($I_{21.6}/I_{2.16}$) from 25 to 80.
7. The PE-RT pipe of any one of the preceding claims, wherein the polyethylene composition is made using one or more metallocene catalysts.
8. The PE-RT pipe of any one of the preceding claims, wherein the polyethylene composition is a blend.
9. The PE-RT pipe of any one of the preceding claims, wherein the polyethylene composition comprises at least one of a polymer processing aid, a thermal stabilizer, a slip agent, a nucleator, a flame retardant, an antioxidant, a filler, a colorant, or mixtures thereof.
10. The PE-RT pipe of any one of the preceding claims, wherein the PE-RT pipe comprises two or more layers of extruded polyethylene composition.

11. The PE-RT pipe of any one of the preceding claims, wherein the PE-RT pipe is a single layer of extruded polyethylene composition.
12. A process to produce the PE-RT pipe of any one of the preceding claims.
13. An assembly comprising the PE-RT pipe of any one of claims 1-11.
14. The assembly of claim 13, wherein the assembly comprises two or more PE-RT pipes of any one of claims 1-11 in fluid communication.

Patentansprüche

1. PE-RT-Rohr, das aus einer Zusammensetzung aus linearem Polyethylen mit niedriger Dichte (LLDPE) gefertigt ist, die mindestens 50 Molprozent von Ethylen abgeleitete Einheiten und von einem oder mehreren alpha-Olefincomonomeren abgeleitete Einheiten umfasst, wobei die Polyethylenzusammensetzung eine Molekulargewichtsverteilung (M_w/M_n) von 2 bis 6, einen langkettigen Verzweigungsindex g'_{vis} von 0,85 bis 0,99, eine Dichte von 0,934 bis 0,960 g/cm³ und ein Scherverdünnungsverhältnis von 1,0 bis 100 aufweist, wobei die eine oder mehreren von alpha-Olefincomonomer abgeleiteten Einheiten abgeleitet sind von Propylen, Buten, 1-Penten, 1-Penten mit einem oder mehreren Methyl-, Ethyl- oder Propylsubstituenten, 1-Hexen, 1-Hexen mit einem oder mehreren Methyl-, Ethyl- oder Propylsubstituenten, 1-Hepten, 1-Hepten mit einem oder mehreren Methyl-, Ethyl- oder Propylsubstituenten, 1-Octen mit einem oder mehreren Methyl-, Ethyl- oder Propylsubstituenten, 1-Nonen, 1-Nonen mit einem oder mehreren Methyl-, Ethyl- oder Propylsubstituenten, ethyl-, methyl- oder dimethylsubstituiertem 1-Decen, 1-Dodecen oder einer Kombination davon, und wobei die Polyethylenzusammensetzung eine Zugfestigkeit bei 5 % Dehnung aufweist, die die folgende Beziehung erfüllt:

$$y > 6,1395 * x^{0,0579} + 0,2,$$

wobei y die Zugfestigkeit (MPa) bei 5 % Dehnung bei 70°C ist und x die Dehnrate (s⁻¹) ist.

2. PE-RT-Rohr nach Anspruch 1, das einen Außendurchmesser von mindestens 16 mm, eine Wanddicke von mindestens 2 mm und eine Zeit bis zum Rohrbruch (Ausfall) bei 95°C / 3,8 MPa von 500 Stunden oder mehr aufweist.
3. PE-RT-Rohr nach Anspruch 1, das einen Außendurchmesser von mindestens 6 mm, eine Wanddicke von mindestens 2 mm und eine Zeit bis zum Rohrbruch (Ausfall) bei 95°C / 3,4 MPa von 1000 Stunden oder mehr aufweist.
4. PE-RT-Rohr nach Anspruch 1, das einen Außendurchmesser von mindestens 16 mm, eine Wanddicke von mindestens 2 mm und eine Zeit bis zum Rohrbruch (Ausfall) bei 110°C / 1,9 MPa von 8760 Stunden oder mehr aufweist.
5. PE-RT-Rohr nach einem der vorhergehenden Ansprüche, bei dem die Polyethylenzusammensetzung einen Schmelzindex (MI) von 0,1 g/10 min bis 5 g/10 min aufweist.
6. PE-RT-Rohr nach einem der vorhergehenden Ansprüche, bei dem die Polyethylenzusammensetzung ein Schmelzindexverhältnis ($I_{21,6}/I_{2,16}$) von 25 bis 80 aufweist.
7. PE-RT-Rohr nach einem der vorhergehenden Ansprüche, bei dem die Polyethylenzusammensetzung unter Verwendung von einem oder mehreren Metallocenkatalysatoren gefertigt ist.
8. PE-RT-Rohr nach einem der vorhergehenden Ansprüche, bei dem die Polyethylenzusammensetzung ein Gemisch ist.
9. PE-RT-Rohr nach einem der vorhergehenden Ansprüche, bei dem die Polyethylenzusammensetzung mindestens eines von einem Polymerverarbeitungshilfsmittel, einem Wärmestabilisator, einem Gleitmittel, einem Kristallkeimbildner, einem Flammschutzmittel, einem Antioxidans, einem Füllstoff, einem Färbungsmittel oder Mischungen davon umfasst.
10. PE-RT-Rohr nach einem der vorhergehenden Ansprüche, das zwei oder mehr Schichten aus extrudierter Poly-

ethylenzusammensetzung umfasst.

11. PE-RT-Rohr nach einem der vorhergehenden Ansprüche, das eine Einzelschicht aus extrudierter Polyethylenzusammensetzung ist.

12. Verfahren zum Produzieren des PE-RT-Rohrs gemäß einem der vorhergehenden Ansprüche.

13. Anordnung, welche das PE-RT-Rohr gemäß einem der Ansprüche 1 bis 11 umfasst.

14. Anordnung nach Anspruch 13, die zwei oder mehr PE-RT-Rohre gemäß einem der Ansprüche 1 bis 11 in Fließverbindung umfasst.

Revendications

1. Tuyau de PE-RT fabriqué à partir d'une composition de polyéthylène basse densité linéaire (LLDPE) comprenant au moins 50 pour cent en moles de motifs issus de l'éthylène et d'un ou plusieurs motifs issus d'un comonomère d'alphaoléfine, la composition de polyéthylène ayant une distribution de poids moléculaires (M_w/M_n) allant de 2 à 6, un indice de ramification de chaîne longue g'_{vis} allant de 0,85 à 0,99, une densité allant de 0,934 à 0,960 g/cm³, et un rapport d'amincissement par cisaillement de 1,0 à 100, le ou les motifs issus d'un comonomère d'alphaoléfine étant issu du propylène, butène, 1-pentène ; 1-pentène comportant un ou plusieurs substituants méthyle, éthyle ou propyle ; 1-hexène ; 1-hexène comportant un ou plusieurs substituants méthyle, éthyle ou propyle ; 1-heptène ; 1-heptène comportant un ou plusieurs substituants méthyle, éthyle ou propyle ; 1-octène comportant un ou plusieurs substituants méthyle, éthyle ou propyle ; 1-nonène ; 1-nonène comportant un ou plusieurs substituants méthyle, éthyle ou propyle ; 1-décène substitué par éthyle, méthyle ou diméthyle ; 1-dodécène ; ou une combinaison correspondante et, la composition de polyéthylène ayant une résistance en traction à 5 % de contrainte qui satisfait la relation suivante :

$$y > 6,1395 * x^{0,0579} + 0,2,$$

y étant la résistance en traction (MPa) à 5 % de contrainte à une température de 70 °C et x étant la vitesse de déformation (s⁻¹).

2. Tuyau de PE-RT selon la revendication 1, le tuyau de PE-RT ayant au moins un diamètre externe de 16 mm, au moins une épaisseur de paroi de 2 mm et ayant un temps de rupture de tuyau (défaillance) à une température de 95 °C/3,8 MPa de 500 heures ou plus.

3. Tuyau de PE-RT selon la revendication 1, le tuyau de PE-RT ayant au moins un diamètre externe de 6 mm, au moins une épaisseur de paroi de 2 mm et ayant un temps de rupture de tuyau (défaillance) à une température de 95 °C/3,4 MPa de 1 000 heures ou plus.

4. Tuyau de PE-RT selon la revendication 1, le tuyau de PE-RT ayant au moins un diamètre externe de 16 mm, au moins une épaisseur de paroi de 2 mm et ayant un temps de rupture de tuyau (défaillance) à une température de 110 °C/1,9 MPa de 8 760 heures ou plus.

5. Tuyau de PE-RT selon l'une quelconque des revendications précédentes, la composition de polyéthylène ayant un indice de fluidité à chaud allant de 0,1 g/10 min à 5 g/10 min.

6. Tuyau de PE-RT selon l'une quelconque des revendications précédentes, la composition de polyéthylène ayant un rapport d'indices de fluidité à chaud ($I_{21,6}/I_{2,16}$) de 25 à 80.

7. Tuyau de PE-RT selon l'une quelconque des revendications précédentes, la composition de polyéthylène étant fabriquée en utilisant un ou plusieurs catalyseurs de métallocène.

8. Tuyau de PE-RT selon l'une quelconque des revendications précédentes, la composition de polyéthylène étant un mélange.

EP 3 710 734 B1

9. Tuyau de PE-RT selon l'une quelconque des revendications précédentes, la composition de polyéthylène comprenant au moins l'un parmi un auxiliaire de traitement de polymère, un stabilisant thermique, un agent glissant, un agent de nucléation, un agent ignifugeant, un antioxydant, une charge, une matière colorante ou des mélanges correspondants.

5

10. Tuyau de PE-RT selon l'une quelconque des revendications précédentes, le tuyau de PE-RT comprenant deux couches ou plus de composition de polyéthylène extrudé.

10

11. Tuyau de PE-RT selon l'une quelconque des revendications précédentes, le tuyau de PE-RT étant une seule couche de composition de polyéthylène extrudé.

12. Procédé pour produire le tuyau de PE-RT selon l'une quelconque des revendications précédentes.

15

13. Assemblage comprenant le tuyau de PE-RT selon l'une quelconque des revendications 1 à 11.

14. Assemblage selon la revendication 13, l'assemblage comprenant deux tuyaux de PE-RT ou plus selon l'une quelconque des revendications 1 à 11 en communication fluïdique.

20

25

30

35

40

45

50

55

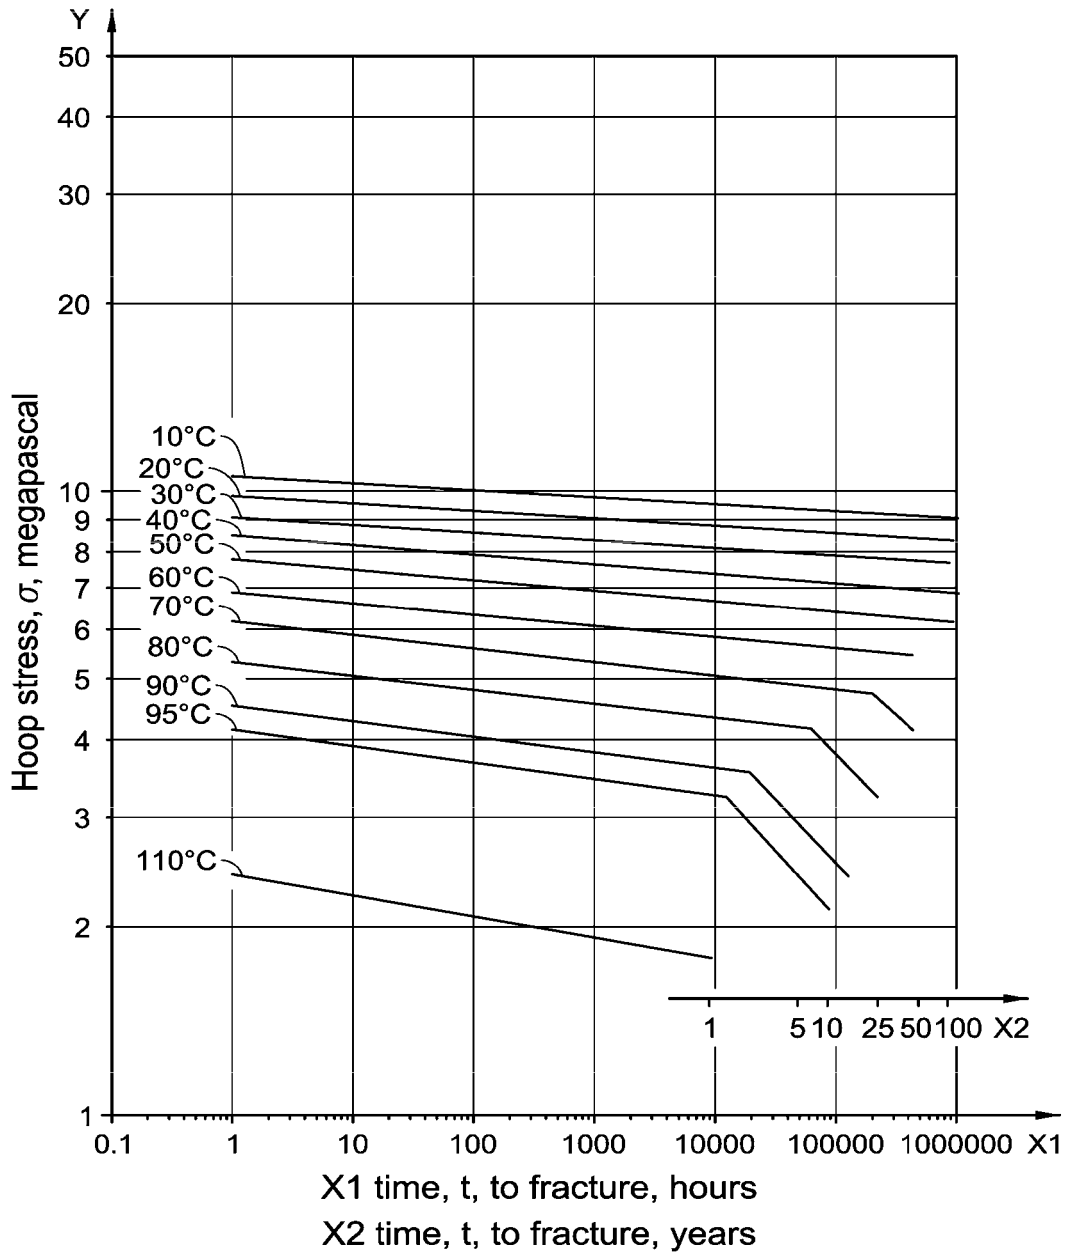


FIG. 1

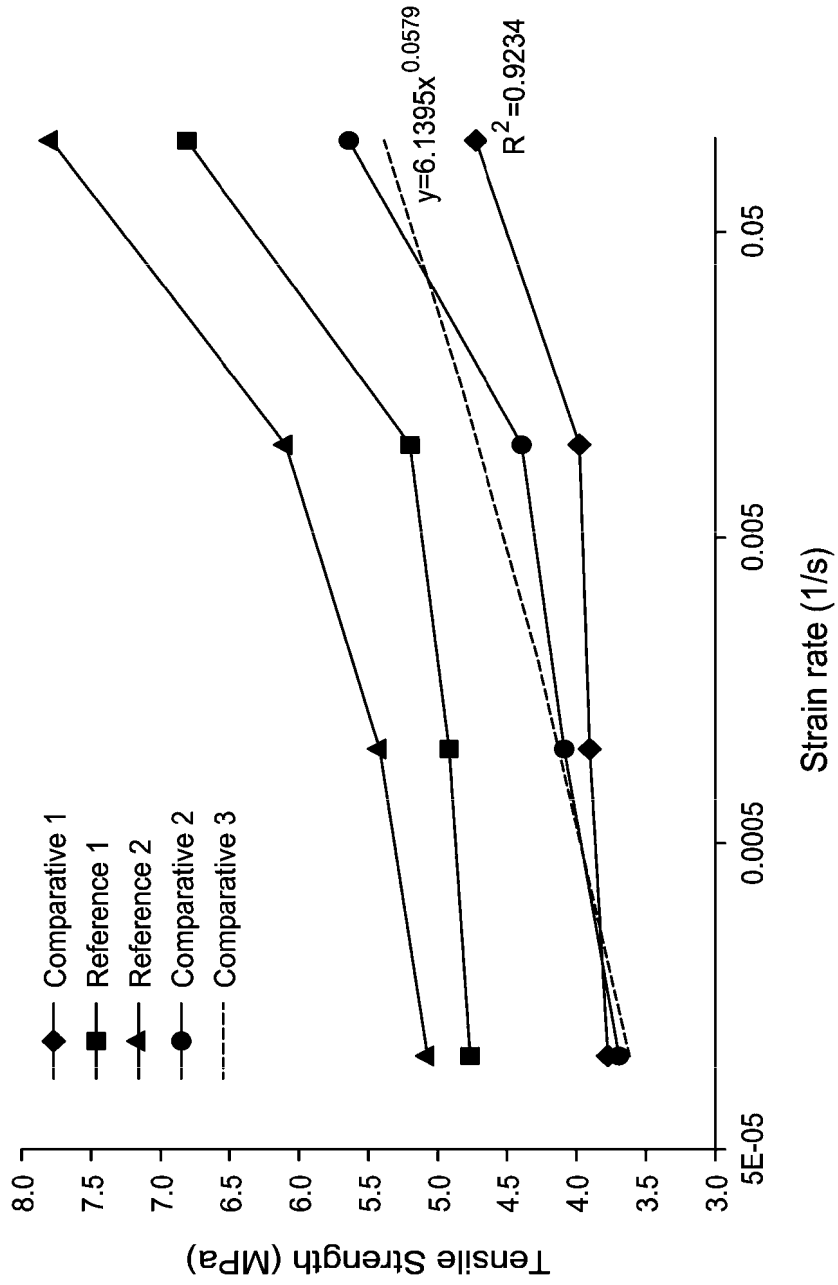


FIG. 2

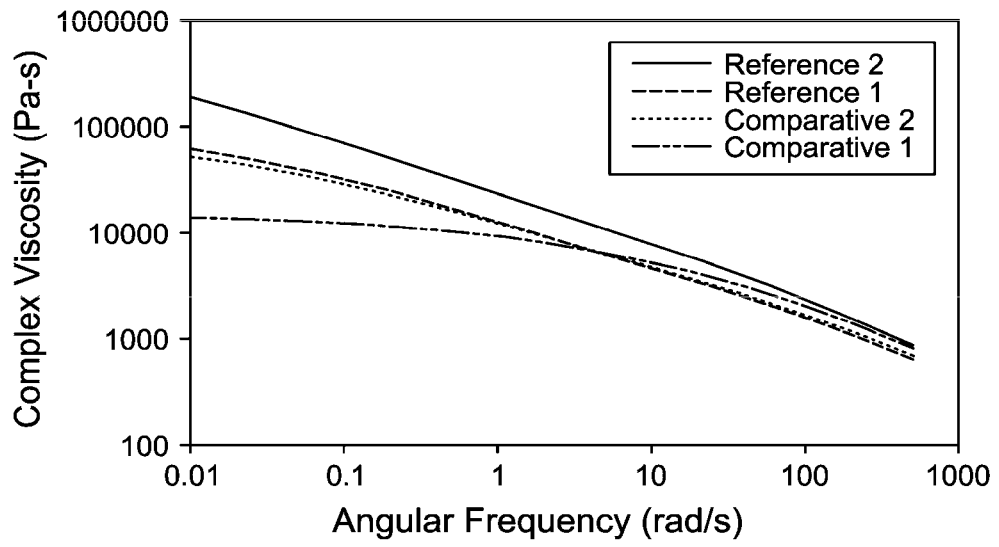


FIG. 3

Fitted Capillary Viscosities at 190°C

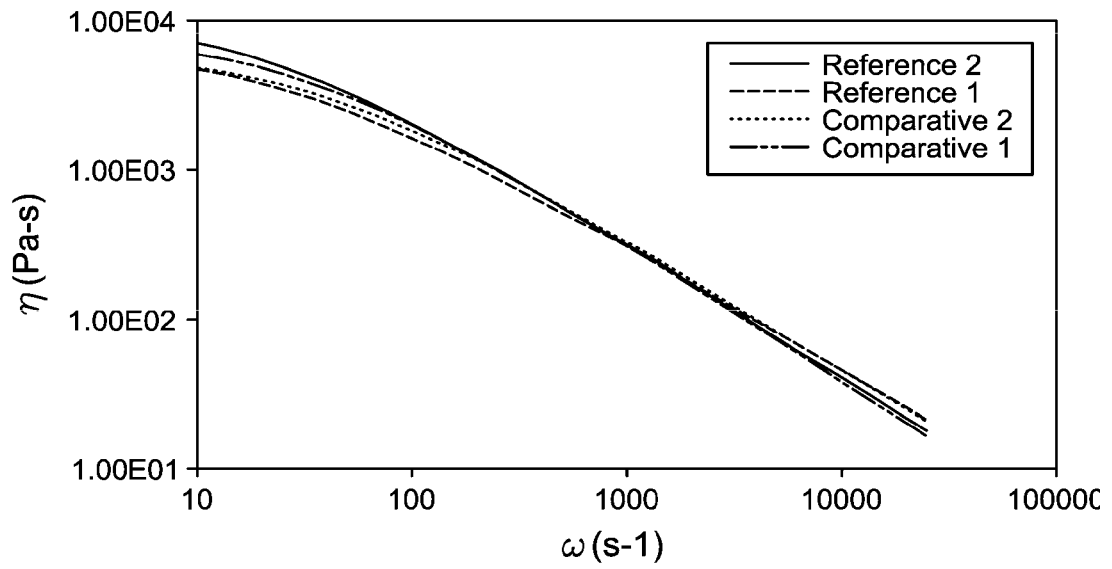


FIG. 4

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2005056657 A2 [0004]
- US 5008204 A [0016]
- WO 9611961 A [0042]
- WO 9611960 A [0042]
- US 4808561 A [0042]
- US 5017714 A [0042]
- US 5055438 A [0042]
- US 5064802 A [0042]
- US 5124418 A [0042]
- US 5153157 A [0042]
- US 5324800 A [0042] [0054]
- US 6380122 B [0042]
- US 6376410 B [0042]
- WO 0198409 A [0042]
- US 5466649 A [0043]
- US 6476171 B [0043]
- US 6225426 B [0043]
- US 7951873 B [0043]
- US 4543399 A [0045]
- US 4588790 A [0045]
- US 5028670 A [0045]
- US 5317036 A [0045]
- US 5352749 A [0045]
- US 5405922 A [0045]
- US 5436304 A [0045]
- US 5453471 A [0045]
- US 5462999 A [0045]
- US 5616661 A [0045]
- US 5668228 A [0045]
- US 5763543 A [0054]
- US 5580939 A [0054]
- US 5633394 A [0054]
- US 133480 [0054]

Non-patent literature cited in the description

- HAWLEY'S CONDENSED CHEMICAL DICTIONARY. John Wiley & Sons, Inc, 1997 [0014]
- WILD et al. *J. Poly. Sci., Poly. Phys. Ed.*, 1982, vol. 20, 441 [0016]
- *Macromolecules*, 2001, vol. 34 (19), 6812 [0018]
- T. SUN ; P. BRANT ; R. R. CHANCE ; W. W. GRAESSLEY. *Macromolecules*, 2001, vol. 34 (19), 6812-6820 [0018]
- M.B. HUGLIN. LIGHT SCATTERING FROM POLYMER SOLUTIONS. Academic Press, 1971 [0019]
- SUN et al. Effect of Short Chain Branching on the Coil Dimensions of Polyolefins in Dilute Solution. *Macromolecules*, 2001, vol. 34 (19), 6812-6820 [0022]