



BLACK MASTERBATCHES

BLACK MASTERBATCH FOR GEOSYNTHETICS SELECTION GUIDE





Contents

Introduction.....	2
Geotextiles.....	3
Geogrids.....	3
Geomembranes.....	3
Landfill Liners and Covers.....	4
Pond Liners.....	5
Tunnel Liners.....	6
Water Containment/Storage.....	6
Storage of Chemical Products and Animal Waste.....	6
Cabot Masterbatches for Geosynthetics.....	7
Cabot Laboratories and Technical Support.....	10
Characteristics of PLASBLAK® Masterbatches for Geosynthetics.....	11

Introduction

This "Black Masterbatch Selection Guide for Geosynthetics" provides detailed information about Cabot's range of black masterbatches designed for use in applications collectively known as **Geosynthetics**.

Geosynthetics have found widespread use in the building industry for environmental engineering, geotechnical applications and water containment. They have many functional uses including sealing, as a barrier layer, filtration, drainage, reinforcement and protection. Applications covered include **Geotextiles, Geogrids and Geomembranes**.

Detailed information is given about each application area. Tables are used to assist in the selection of the correct Cabot masterbatch, which depends on requirements of the final product. Performance information is given for each masterbatch.

Geotextiles

Geotextiles are permeable polymeric materials usually in sheet form and can be either woven or non-woven.

Their main functions are:

- ◆ **Stabilisation/Reinforcement:** woven geotextiles on soft substrates spread applied loads and improve structural stability
- ◆ **Separation:** keeping apart two layers of a different nature, such as gravel and a soft sub-base material
- ◆ **Drainage:** due to the filtering effect geotextiles allow sub-surface water to flow into drains whilst preventing clogging
- ◆ **Protection:** mechanical protection of geomembranes against abrasion and puncture

Woven geotextiles are based on polypropylene slit films and are mostly used in road building and embankments. They provide good mechanical strength at low cost.

Non-woven geotextiles are either heat bonded or needle-punched to form continuous mats. They have particularly good water flow performance and filtering characteristics and can be found in most drainage systems or as highly permeable separation layers.

Geogrids

Geogrids are uni- or bi-axially oriented matrix structures of very high strength.

They provide stability in earth retention systems. Examples are retaining walls in railway or highway projects. They are also used in various construction foundations such as reinforcement of embankments on soft substrates.

The most important characteristics of geogrids are high water drainage combined with exceptional mechanical strength and long term creep resistance.

Geomembranes

Geomembranes are flexible or semi-rigid sheets offering high barrier resistance to water and gases. They can be found in different application areas such as:

- ◆ Landfill liners and covers
- ◆ Pond liners
- ◆ Tunnel liners
- ◆ Water containment/storage
- ◆ Storage of chemical products or animal waste

The most commonly used materials are HDPE, VLDPE or PVC.

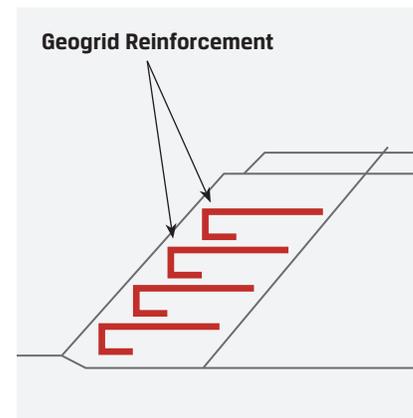


Fig 1. Typical earth retention system



Landfill Liners and Covers

Municipal waste landfills are one of the most important and demanding applications for geomembranes and geotextiles. Their role is to protect the environment, in particular the groundwater, from both leachate and landfill gas.

Multi-barrier concept

Landfill designs vary from country to country and depend on the characteristics of the solid waste as well as the geologic and hydrologic conditions at the landfill site. Most are based on a multi-barrier concept with a HDPE/MDPE geomembrane as a barrier for water and any type of polar substance including heavy metals. Non-polar or chlorinated hydrocarbons that may permeate through the geo-membrane are retained at the surface of a compacted clay layer acting as a second barrier.

The lining system also includes a drainage layer above the geomembrane. It is composed of gravel or crushed stones. To avoid local strains that would eventually result in the perforation of the membrane, a heavy protective geotextile mat is used (typically a non-woven HDPE or PP geotextile of $> 1200 \text{ g/m}^2$).

For landfills with steep sided slopes, a high tensile geogrid reinforcement is needed to ensure stability and prevent excessive straining of the geomembrane.

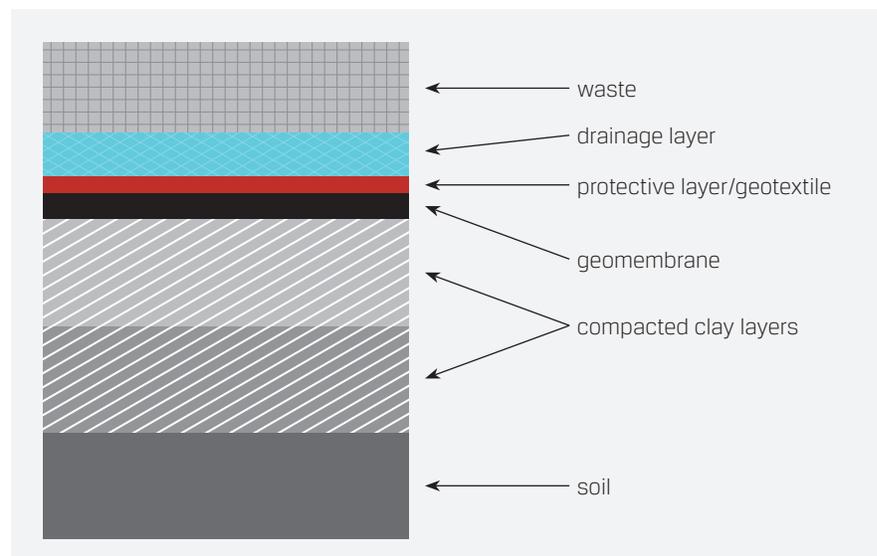


Fig 2. Cross-section of typical landfill multi-barrier concept

Requirements

HDPE membranes for landfill caps and base liners have exceedingly long life expectations of 10, 20, 30 or sometimes 50 or more years with a warranty provided by the supplier/producer. In most cases national standards must be met such as GRI-GM13 (USA & UK), BAM standards (Germany) and KIWA (Netherlands). This puts severe technical requirements on the material, especially with respect to the following:

- ◆ **Environmental stress cracking resistance (ESCR):** resulting from the combined presence of surface active substances encountered in the leachate of municipal or hazardous waste landfills and stresses induced by deformation of the soil or waste layer.
- ◆ **Tensile properties:** appropriate long-term tensile properties (especially elongation at break limit) are essential. This requires selection of a suitable polyethylene type as well as a thermal and ultra violet (UV) stabilisation package. Severe uniaxial and bi-axial tensile or break tests need to be satisfied.
- ◆ **Weldability:** excellent weld strength is needed to ensure the tightness of the membrane. Short-term strength but even more long-term weld strength (for example, after ageing for 800 hours in an aggressive media) is a key requirement.
- ◆ **Barrier properties:** to maintain separation of different chemicals present in landfills, such as polar substances, high crystallinity is required combined with excellent chemical resistance.

Pond Liners

Pond liners are another application area for geomembranes in polyethylene, PVC, EPDM or butyl rubber and normally incorporate carbon black as the UV stabiliser package.



Tunnel Liners

Another demanding application for geomembranes is tunnel liners. These are required to be waterproof, chemically inert and non-porous to protect construction work in the tunnel. They also need to be resistant to breakdown by underground deposits of methane gas and hydrocarbons. Tunnel liners normally require a certain degree of UV protection.

A typical tunnel lining construction is concrete-geomembrane-concrete. The outer layer of concrete holds the tunnel open during construction until the waterproofing geomembrane is installed. The inner layer of concrete is then put over the geomembrane and forms the main structure of the tunnel.



Water Containment/Storage

Geomembranes for water containment and storage, such as canal and reservoir liners, need to have excellent UV resistance, stress cracking resistance, chemical resistance and mechanical properties. This type of geomembrane is normally produced from polyethylene for its superior stress crack resistance.

Storage of Chemical Products and Animal Waste

Increased environmental awareness has made it necessary to find environmentally acceptable ways of containing chemical and animal waste products to prevent contamination of ground water.

Geomembranes are used to line holding lagoons, anaerobic treatment ponds and evaporation ponds in waste facilities. Geotextiles can be used in combination with the geomembrane to provide additional cushioning and protection.

For chemical storage, the essential technical requirements are chemical resistance, durability, stress cracking resistance and UV resistance. Animal waste requires very low permeability, excellent UV resistance, stress cracking resistance and resistance to methane gas. Therefore this type of geomembrane is usually produced from HDPE.

Cabot Masterbatches for Geosynthetics

Geotextiles

Application	Suggested Cabot grades	Key characteristics
Landfill liner and protection stabilisation	PE2642 PE2640	Premium weathering while PE2640 is STD
	LL4752	Weathering masterbatch with superior St-OIT
Earth retention systems	PE2642 PE2640	Standard weathering grade
	LL4752	Improved compatibility with MDPE/HDPE
	PP6190	Suitable for PP based geonets/geotextiles

Geogrids

Application	Suggested Cabot grades	Key characteristics
Earth and embankment retention	HD4708	Maximum protection against UV
	PP6190	Excellent UV protection with long term stabilisation

Geomembranes

Application	Suggested Cabot grades	Key characteristics
Landfill liners and caps	LL4752	Improved compatibility with MDPE/HDPE, high performance long term stabilisation
	PE2642	Standard weathering grade.
	PE2640	Good process and long term heat stability
Pond liners and waste water lagoons	PE6370	Weathering masterbatch with superior St-OIT/HP-OIT Long term stabilization - GM13 Anti-oxidant and UV stabilizers
	LL4752	Improved LL/HDPE compatibility Food contact compliance
	PE4881	For mono or multi-layer poly-ethylene films requiring good opacity and high resistance to UV light.
	PE2642 PE2640	Standard weathering grade
Tunnel lining	PE2272	Good coloration and opacity




The geomembrane industry has traditionally used pre-coloured compounds but increasingly the geomembrane manufacturers are adding masterbatches to the base polymer. The role of the masterbatch and carbon black is to provide optimum UV and thermal protection of the membrane. In Europe many landfills for municipal waste remain open for periods of several years. This high exposure would cause severe degradation to the polyethylene alone and the resulting deterioration of physical properties could eventually lead to failure.

It is therefore of paramount importance that the correct masterbatch designed to fulfil these severe performance requirements is selected.

High UV absorption capacity: Carbon black is one the most effective and most widely used UV light stabilisers for plastic materials. Significant research work at Cabot Corporation has demonstrated the link between carbon black morphology (surface area and structure) and dispersion level on weatherability. All black masterbatches for geosynthetic applications with high UV weathering demands are based on high performance carbon blacks.

The following graph compares the weathering performance of 650 μm sheet containing LL4752, a weathering type carbon black masterbatch with that of a similar sheet containing general purpose carbon black masterbatch, PE2272.

Both sets of sheet contain carbon black at a 2% loading:

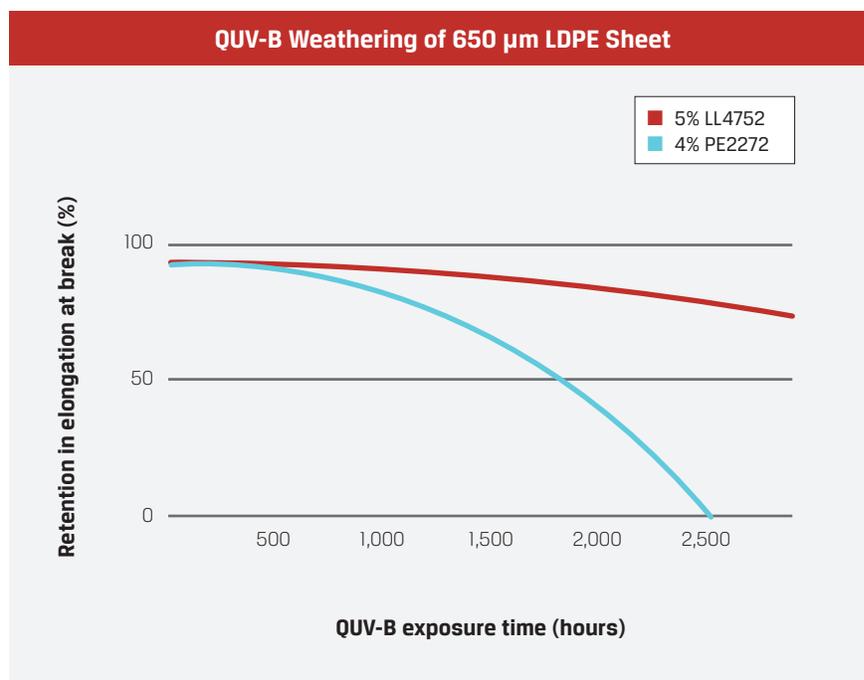


Thermal stabilisation: due to its unique surface chemistry, carbon black limits the degradation process that occurs in the polymer. Most of the masterbatch types however contain additional antioxidant packages that provide long term heat ageing protection as well as processing safety.

Oxidation induction time (OIT) measurements are used as a measure of thermal stability by several major standards and testing Institutes. By the selection of an appropriate stabiliser package the OIT can be significantly improved. The masterbatch can therefore contribute to meeting the expected service life expectations.

Ease of dilution: to achieve optimum efficiency the masterbatch must be homogeneously diluted in the base polymer. Poor blending can lead to weak points in the membrane as well as delamination at high strains. Depending on the customer's extrusion equipment and the base polymer characteristics CABOT can propose masterbatch types that respond to each specific requirement and provide an optimum homogeneity level.

Compatibility with dilution polymer: whilst the role of the masterbatch is to provide long term protection it should have a minimum influence on the mechanical properties, chemical resistance and stress-crack behaviour of the geosynthetic structure. All masterbatches are carefully designed to minimise the loss in properties of the dilution polymers.

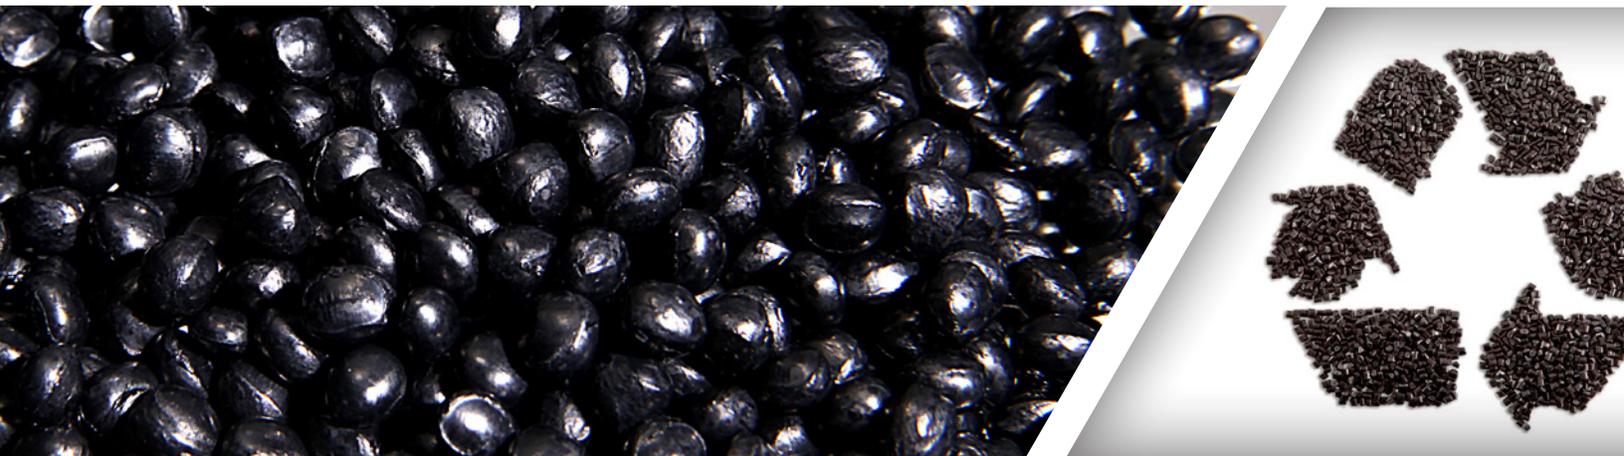


Cabot Laboratories and Technical Support

State of the art testing equipment at the CABOT Application Development Centre laboratories enables determination of the key properties of geosynthetic products as follows:


- ◆ Weathering performance
 - Natural: outdoor facilities in several locations covering a wide range of irradiation levels
 - Artificial: QUV + ATLAS Ci65A
- ◆ Coloration and opacity
- ◆ Viscosity: Capillary rheometer, melt indexer, Brabender
- ◆ Thermal stability (HP-OIT, oven tests, multiple extrusion)
- ◆ Mechanical properties

Our Application Development Centre team provides excellent technical service, combining processing and application expertise with extensive analytical services.

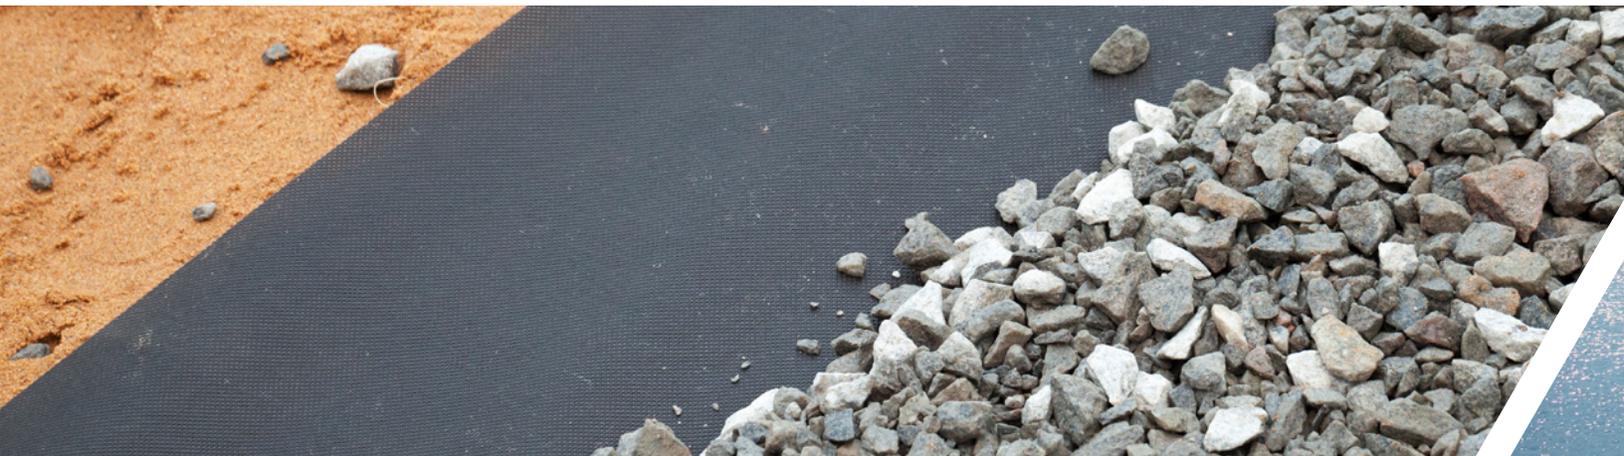

Characteristics of PLASBLAK® Masterbatches for Geosynthetics

Grade	% carbon black	Carbon black type	MFI (g/10 mins)	Test conditions	Carrier	Density (kg/m ³)	Stabilisation package
PE2642	40	Premium weathering	20	21.6kg/190°C	LL/LDPE	1150	Yes
HD4708	40	Premium weathering	13	21.6kg/190°C	HDPE	1180	Yes
PE6370	40	Weathering	9	10/190°C	Polyethylene	1180	Yes
PP6190	35	Weathering	4	5kg/230°C	PPH	1100	Yes
LL4752	40	Weathering	8	10kg/190°C	LLDPE	1150	Yes
PE2272	50	General purpose	7	10kg/190°C	LDPE	1230	No
PE2824	26 equivalent	Not specified	40	21.6kg/190°C	LDPE	1560	No
PE2640	40	Weathering	24	21.6kg/190°C	Polyethylene	1250	No
PE4881	40	Weathering	9	10kg/190°C	LDPE	1150	No
PE6202	48.5	General purpose	10	10kg/190°C	LDPE	1210	No

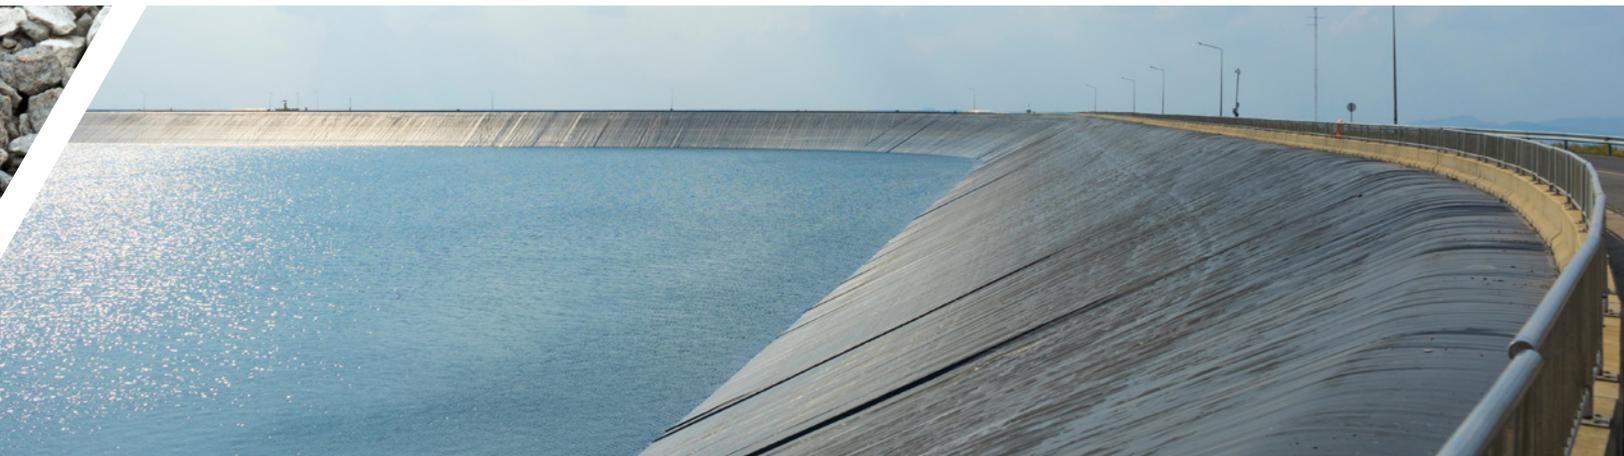

NORTH AMERICA

Cabot Plastics Canada
707 Pierre Tremblay Boulevard
Saint-Jean-sur-Richelieu
QC, J2X 5G5
Canada
T +1 450 347 4371
F +1 450 347 9936

SOUTH AMERICA

Cabot Brasil Industria
e Comercio Ltda.
Rua do Paraiso 148 - 5 andar
04103-000 São Paulo,
Brazil
T +55 11 2144 6400
F +55 11 3253 0051

EUROPE

Cabot Specialty Chemicals
Coordination Center
SIA Cabot Latvia
Gustava Zemgala gatve
74A
LV-1039, Latvia
T +371 6705 0700
F +371 6705 0985

MIDDLE EAST & AFRICA

Cabot Dubai
P.O. Box 17894
Jebel Ali Free Zone
LOB 15, Office 424
Dubai
United Arab Emirates
T +371 6705 0700
F +371 6705 0985

ASIA PACIFIC

Cabot China Ltd.
558 Shuangbai Road
Shanghai 201108
China
T +86 21 5175 8800
F +86 21 6434 5532

JAPAN

Cabot Specialty Chemicals Inc.
Sumitomo Shiba-Daimon Bldg. 3F
2-5-5 Shiba Daimon,
Minato-ku
Tokyo 105-0012
Japan
T +81 3 6820 0255
F +81 3 5425 4500

The data and conclusions contained herein are based on work believed to be reliable, however, Cabot cannot and does not guarantee that similar results and/or conclusions will be obtained by others. This information is provided as a convenience and for informational purposes only. No guarantee or warranty as to this information, or any product to which it relates, is given or implied. This information may contain inaccuracies, errors or omissions and CABOT DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED, INCLUDING MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AS TO (i) SUCH INFORMATION, (ii) ANY PRODUCT OR (iii) INTELLECTUAL PROPERTY INFRINGEMENT. In no event is Cabot responsible for, and Cabot does not accept and hereby disclaims liability for, any damages whatsoever in connection with the use of or reliance on this information or any product to which it relates.

The PLASBLAK name is a registered trademark of Cabot Corporation.



CABOT 

cabotcorp.com

© 2021 Cabot
Corporation. R07 - 2/2021