

(19)



(11)

EP 3 809 032 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
22.01.2025 Bulletin 2025/04

(21) Application number: **20213943.2**

(22) Date of filing: **02.06.2016**

(51) International Patent Classification (IPC):

F16L 58/10 ^(2006.01) **F16L 9/06** ^(2006.01)
B29K 309/08 ^(2006.01) **F16L 11/115** ^(2006.01)
B29C 48/03 ^(2019.01) **B29C 48/00** ^(2019.01)
B29C 48/151 ^(2019.01) **B29C 48/285** ^(2019.01)
B29C 48/07 ^(2019.01) **B29C 63/10** ^(2006.01)
B29D 23/00 ^(2006.01)

(52) Cooperative Patent Classification (CPC):

F16L 58/1063; B29C 48/0021; B29C 48/07;
B29C 48/131; B29C 48/151; B29C 48/2883;
B29C 48/2886; B29C 63/10; B29D 23/00;
F16L 9/06; F16L 11/115; B29K 2309/08

(54) **PIPE WITH AN OUTER WRAP**

ROHR MIT AUSSENUMMANTELUNG

TUYAU À ENVELOPPE EXTÉRIEURE

(84) Designated Contracting States:

AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR

(30) Priority: **05.06.2015 US 201514732146**

(43) Date of publication of application:
21.04.2021 Bulletin 2021/16

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
16729455.2 / 3 303 896

(73) Proprietor: **Advanced Drainage Systems, Inc.**
Hilliard, OH 43026 (US)

(72) Inventors:
• **VANHOOSE, Bill Russell**
Hilliard, Ohio 43026 (US)

- **PIAZZA, Nicholas James**
Hilliard, Ohio 43026 (US)
- **VITARELLI, Ronald Robert**
Hilliard, Ohio 43026 (US)
- **ATCHISON, Owen Michael**
Hilliard, Ohio 43026 (US)
- **FROST, Tyler James**
Hilliard, Ohio 43026 (US)

(74) Representative: **Finnegan Europe LLP**
1 London Bridge
London SE1 9BG (GB)

(56) References cited:

WO-A1-2005/063465 WO-A1-94/28694
GB-A- 2 424 935 GB-A- 550 448
US-A- 5 089 074 US-A1- 2004 099 324
US-A1- 2007 062 595 US-A1- 2008 210 327
US-A1- 2010 224 306

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 3 809 032 B1

Description

Technical Field

[0001] This disclosure relates generally to pipe, and more particularly to pipe with an outer wrap, including systems and methods for making the same.

Background

[0002] Corrugated pipe is commonly used for drainage of soil and transportation of surface water. The corrugations typically create a pipe profile with steep sides and deep valleys. Given that these pipes are typically constructed using plastic, the corrugations may provide necessary structural integrity for the pipe by providing needed radial stiffness. GB 550 448 A, WO 2005/063465 A1, US 2004/099324 A1, US 2007/062595 A1, US 2008/210327 A1, US 2010/224306 A1, GB 2 424 935 A, WO 94/28694 A1 and US 5 089 074 A relate to pipes or hoses of the prior art. In particular WO 2005/063465 A1 discloses a plastic pipe comprising at least one connecting point for connection to another plastic pipe or to another connecting piece, wherein the connecting point has a sealing area. A reinforcement is applied to the connecting point in the sealing area and substantially or completely prevents the plastic of the connecting point from creeping in the sealing area.

[0003] However, the valleys of the corrugated pipe may also require inconvenient construction accommodations. For example, corrugated pipe may require additional work to backfill. Filling material may not readily conform to the corrugated exterior, requiring additional work to fill the valleys of the exterior wall. Triple wall corrugated pipe may include an outer layer of plastic, which may produce a less capricious outer surface. However, triple wall pipe suffers from increased cost, weight, and thickness. For example, the outer layer of a triple wall pipe may require additional material, adding significant production material costs and resulting in a heavier pipe.

[0004] It is thus apparent that the need exists for a corrugated pipe having an outer wall or layer that may be lighter in weight, stronger, cheaper to produce, more efficient to construct, and exhibit a narrower width and a lower profile.

SUMMARY

[0005] The invention is defined by the claims.

[0006] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only and are not restrictive of the invention, as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] The accompanying drawings, which are incor-

porated in and constitute a part of this disclosure, illustrate exemplary embodiments and, together with the description, serve to explain the disclosed principles.

FIG. 1 illustrates an exemplary corrugated pipe according to some embodiments of the present disclosure.

FIG. 2 illustrates an exemplary corrugated pipe having an outer wrap according to some embodiments of the present disclosure.

FIG. 3 illustrates a cross-sectional view of an exemplary corrugated pipe having an outer wrap according to some embodiments of the present disclosure.

DETAILED DESCRIPTION

[0008] Exemplary embodiments are described with reference to the accompanying drawings. In the figures, the left-most digit(s) of a reference number identifies the figure in which the reference number first appears. Wherever convenient, the same reference numbers are used throughout the drawings to refer to the same or like parts. While examples and features of disclosed principles are described herein, modifications, adaptations, and other implementations are possible without departing from the scope of the disclosed embodiments. It is intended that the following detailed description be considered as exemplary only, with the true scope and spirit being indicated by the following claims.

[0009] While standard corrugated pipe often suffers from increased jobsite backfill work, the pipe could be covered by a material to produce a smooth, but strong, exterior wall. For example, wrapping standard corrugated pipe in a material may result in an exterior wall without valleys which may eliminate gaps in the soil when placed in the ground at a jobsite, solving backfill problems. The outer wrap of the present invention may solve the backfill problems associated with dual wall corrugated pipe while not adding significant thickness to the pipe wall. The outer wrap material may also increase the strength of the pipe.

[0010] An outer wrap may also allow additional pipe configurations because the wrap may consist of different materials than the pipe. For example, selected wrap material may allow manufacturers to reduce costs, while increasing strength, even though the particular wrap material may result in a heavier pipe. Other wrap materials may increase the strength to weight ratio of the pipe. Additional properties of alternative wrap materials may allow manufacturers to more effectively design wrapped pipe solutions to meet design constraints.

[0011] Illustrative embodiments of the present disclosure are listed below. In one embodiment, an exemplary corrugated pipe with an outer wrap is disclosed. In another embodiment, an exemplary process for making corrugated pipe with an outer wrap is disclosed. The products and processes disclosed may be used in com-

bination or separately. For example, the disclosed process may be used to make additional products. Further, disclosed products may be manufactured using additional processes.

[0012] FIG. 1 illustrates an exemplary corrugated pipe according to some embodiments of the present disclosure. Corrugated pipe 100 may be conventional single wall pipe or dual wall pipe that is well known in the art. Additional types of pipe may serve as corrugated pipe 100 consistent with this disclosure.

[0013] Corrugated pipe 100 may include a corrugated outer wall. For example, corrugated pipe 100 may include a series of corrugations 120. Corrugations 120 may run the length of corrugated pipe 100. In an embodiment, corrugations 120 may form spiral corrugations or annular corrugations. For example, corrugations 120 could spiral in the longitudinal around the circumference of the pipe. Corrugated pipe 100 may connect to other pipes. In an embodiment, corrugated pipe 100 may include bell 110 to facilitate connections to other pipes. For example, bell 110 may surround and contain a spigot end of another pipe. The spigot may have a smaller outer diameter than the bell, so that the spigot may fit into bell 110. Other connection types may be used with corrugated pipe 100. For example, a coupler may be used to connect to other pipes.

[0014] In an embodiment, corrugated pipe 100 may have an inner wall. For example, corrugated pipe may be a dual wall pipe. A smooth inner wall surface may be necessary or desirable for certain applications. Accordingly, a dual wall pipe, which includes a smooth inner wall may be used to satisfy design constraints. For example, a smooth inner wall may be necessary to meet pipe strength requirements or to satisfy flow path specifications. When specifications require a consistent pipe inner diameter, plans may rely on dual wall pipe having an inner wall. In other embodiments, corrugated pipe may be a single wall pipe.

[0015] Corrugated pipe 100 may be made of plastic. In an embodiment, the material of corrugated pipe 100 may include plastic or thermoplastic polymers. For example, corrugated pipe may be made of high density polyethylene (HDPE) or polypropylene (PP). Corrugated pipe 100 may alternatively comprise a variety of other materials including, for example, other plastics, metals, or composite materials.

[0016] While FIG. 1 describes corrugated pipe 100, other pipe types may be used consistent with this disclosure. In an embodiment, ribbed pipe may be wrapped. In other embodiments, pipes having any profile may be wrapped.

[0017] FIG. 2 illustrates an exemplary corrugated pipe having an outer wrap according to some embodiments of the present disclosure. Wrapped pipe 200 may include integrated bell 210, similar to corrugated pipe 100. While not depicted, various bell designs may be used, such as a proud bell, for example. A proud bell may have an outer diameter that is larger than the outer diameter of the

corrugated pipe body. Proud bells have an advantage over integrated bells in that they may be joined to a pipe end having a cross section matching that of the corrugated pipe body, rather than a specific spigot end. Therefore, the proud bell may connect to pipe cut to any length. However, integrated bells may be preferable to proud bells in underground applications, because integrated bells lie on grade in a trench. Conversely, proud bells may require **the digging of "bell holes" to excavate additional** space in the trench to accommodate the larger outer diameter of the proud bell. As illustrated, wrapped pipe 200 may include spigot 220 to connect to bells of other pipes.

[0018] Wrapped pipe uses corrugated pipe 100 with outer wrap 230 applied. In an embodiment of the present disclosure, outer wrap 230 may form a spiral pattern. Outer wrap 230 is applied as a helix (e.g., helical wrap 232) around corrugated pipe 100.

[0019] Outer wrap 230 may be formed using fibers and plastic. In an embodiment, fibers (e.g., fiberglass or carbon fibers) may be embedded in plastic. Polymers such as high density polyethylene (HDPE), polypropylene (PP), or polyvinyl chloride (PVC) may be used as the plastic. Other fibers or plastics may be used consistent with this disclosure.

[0020] In an embodiment, wrapped pipe may have a pipe and wrap of different materials. For example, a pipe may be made of HDPE and a wrap may be made of fiber reinforced HDPE. This combination of materials may result in an increased strength to weight ratio because the product may be manufactured such that higher quality materials may be located more efficiently within the product.

[0021] In another example wrapped pipe, the corrugations may be made of a cheaper material. Higher quality materials may be used for the outer wrap and/or the liner. Higher quality materials may have a higher elastic and flexural modulus, better resistance to stress cracking, impact performance, and abrasion resistance, for example. When corrugations are made from a different material than the liner and/or the outer wrap, the corrugations may be manufactured using a material with additives that reduce cost at the relative expense of structural integrity.

[0022] In another embodiment, outer wrap 230 may use continuous strand fiber. The fibers may run from a reel, embedding unbroken strands in a helix that wraps the pipe. For example, spools of fiberglass thread may provide uninterrupted strands of fiberglass for embedding in plastic around a pipe. Continuous strand fiber may result in wrapped pipe with greater resilience than other wrap types.

[0023] In an embodiment, outer wrap 230 may use non-continuous fiber. Pelletized or short segments of fiber may be embedded in plastic. For example, short fiber strands of 0.25 to 1 inch in length may be used. By configuring the feed of the molten plastic as the fiber strands are embedded in plastic, the fiber strands may align semi-oriented to the flow path as they are em-

bedded in plastic. For example, the fibers may be oriented linear to the flow path (e.g., circumferentially to the pipe) with minor deviations in the fiber orientation. In an embodiment, semi-oriented may mean that more fibers would align parallel to the flow path than perpendicular to the flow path. For example, semi-oriented fiber may lay, on average, at an angle less than 45 degrees from the direction of the flow path.

[0024] In an embodiment, the molten plastic may be pulled at a rate higher than the extruder flow rate to further orient the fiber stands in the direction of the flow. The fiber orientation may vary based on the type of fiber used, the length of the fibers, the diameter of the pipe to be wrapped, the type of plastic that the fibers are to be embedded in, and the thickness of the outer wrap.

[0025] In an embodiment, outer wrap 230 may use fiberglass impregnation. Pelletized or short segments of fiber may be embedded in plastic with no deliberate orientation, which may result in an isotropic material, which may have uniform structural integrity in all directions. By reducing the flow rate of the material through the die and/or reducing pulling (e.g., stretching) of the material as it exits the die, manufacturers may reduce the orientation of fiber strands in the outer wrap.

[0026] In another embodiment, outer wrap 230 may not use fibers. Plastic may be applied to corrugated pipe 100 by itself. For example, HDPE may be wrapped onto a pipe in a helix to create a smooth outer layer. The temperature and flow rate of the plastic may be dependent upon the thickness of the wrap, the diameter of the pipe, and the type of material used in the plastic wrap without fiber. Example flow rates may range from 10 to 30 feet per minute.

[0027] Outer wrap 230 may run the length of the pipe. When coupling mechanisms at the ends of the pipe require specific materials, outer wrap 230 may span the length of the corrugations, ending just before coupling mechanisms, such as bell 210 or spigot 220, for example. Further, pipes may be wrapped in portions or segments as a particular application may require.

[0028] In an embodiment, wrap 230 may wrap bell 210 completely and end at spigot 220. For example, bell 210 may be completely covered. In another embodiment, both bell 210 and spigot 220 may not be wrapped. When a continuous wrap process is used, a mechanism may be used to remove the wrap from spigot 220 and/or bell 210 as desired, regardless of the bell type.

[0029] FIG. 3 illustrates a cross-sectional view of an exemplary corrugated pipe having an outer wrap according to some embodiments of the present disclosure. Pipe profile 300 may include liner 340 and corrugation layer 320. These two layers may form a dual wall pipe. In some embodiments, liner 340 may not be used, and corrugation layer 320 may form a single wall pipe that is wrapped. The outer wrap may form third wall 330. For example, third wall 330 may be a layer of fibers embedded in plastic.

[0030] In an embodiment, the wrap may be applied in a

helix, producing third wall edge 332 that may be generated from the overlap of the helix. For example, the corrugated pipe may be rotated as the wrap is applied down the length of the pipe. This process may apply the outer wrap as a spiral. To ensure adequate coverage by the wrap, each spiral may slightly overlap, producing third wall edge 332.

[0031] In an embodiment, the wrap material may bond with the pipe material. For example, the outer wrap and corrugation materials may be welded together by heating the materials to their thermoplastic state and pressing them together. Some materials used for the outer wrap and the corrugations may allow the use of solvent cements or epoxies to bond the wrap to the corrugations.

[0032] In an embodiment, the wrap material may be secured to the pipe by the tension of the wrap. Certain wrap and corrugation materials may not bond well together. For example, when dissimilar materials are used, such as an outer wrap made of PP and a corrugated pipe made of HDPE, a friction fit may secure the wrap to the corrugated pipe. The frictional forces may be strong enough such that the materials may appear to be attached. However, the wrap may separate from the pipe with less force than when the wrap is welded to the pipe.

[0033] In some embodiments, an outer wrap may be applied using a manufacturing process in accordance with some embodiments of the present disclosure. The steps discussed below and their order are merely exemplary. Steps may be performed in other orders. Further, certain steps may be omitted or duplicated consistent with this disclosure.

[0034] In an embodiment, a pipe may be formed in a corrugator. For example, a dual wall pipe may be formed. An exemplary pipe having an inner liner layer with a second corrugated layer is produced using known processes. In an embodiment, a single wall pipe with only a corrugated layer may be produced. In an embodiment, pipe may be formed using a mandrel, such as ribbed pipe. Other embodiments may utilize pipe having any profile.

[0035] After the pipe is formed, the pipe may be cut to length. For example, the corrugated pipe may be cut to its final length or a usable length so that the pipe may be transferred to the outer wrap die.

[0036] In an embodiment, instead of the pipe being cut to length, the outer wrap may be applied in-line. For example, the uncut corrugated pipe may continue directly to the outer wrap die assembly. The die assembly may apply the outer wrap in the pipe production line. The die may rotate around the stationary pipe after it exits the corrugator to apply the outer wrap.

[0037] Control equipment may determine a wrap type. In an embodiment, a computer controller may control the flow and application of the outer wrap extrusion die. For example, the die may apply oriented continuous strand fiber, semi-oriented non-continuous fiber, fiberglass impregnation, or no fiber with the plastic. The die may allow the wrap type to be changed.

[0038] The die assembly may wrap the pipe. In an

embodiment, a corrugated pipe may be placed adjacent to a filament die. The pipe may be rotated as it moves past the openings of the filament die. The rotation and traversal of the pipe in relation to the die assembly may be controlled so that the ribbon extruded from the die assembly forms a continuous outer layer.

[0039] In an embodiment, the pressure, temperature, and type of materials used in the extrusion process may be altered based on the wrap type. For example, the temperature or flow rate may alter the wrap. For example, for HDPE temperatures ranging from 350 to 450 degrees Fahrenheit may be used to heat the wrap material for extrusion. The die may extrude plastic at a width ranging from 4 to 20 inches. When the wrap is applied as a helix, the pitch of the helix may be determined based on the outer circumference of the pipe and the width of the extruded plastic. The die may also switch from continuous to non-continuous fiber. The switching process may be substantially automated by use of mechanical automation tools to change the sources of materials or die settings.

[0040] Control equipment may also determine the thickness of the wrap layer. The control equipment may facilitate a particular flow rate of wrap material (e.g., the flow rate(s) plastic and/or fiber). Control equipment may also provide a particular wrap thickness by controlling the feed rate pulling the extruded material. For example, manufacturing equipment may pull extruded outer wrap (e.g., plastic or plastic with fibers) twice as fast as the material is extruded. When the ratio of the pull rate to the extrusion flow rate is greater than 1:1, the outer wrap material may stretch as it is applied to the pipe. Various pull to feed ratios may be used to control the thickness of the outer wrap. Moreover, a higher pull to feed ratio (e.g., increased pulling of the outer wrap) may result in increased alignment of the fiber strands, when they are embedded in the plastic of the wrap. When using continuous strand fiber, pulling the outer wrap material may have greater limitations. For example, lower pull to feed ratios may need to be used. In an example wrapped pipe, a corrugated HDPE pipe may be wrapped by heating fiber reinforced HDPE to a temperature of 350 to 450 degrees Fahrenheit for extruding at a rate of 20 feet per minute (e.g., plus or minus 5 feet per minute). The wrap material may be pulled at a ratio of 5:4, for example, relative to the extrusion rate. When the pipe may have an inconsistent outer diameter, such as pipes with proud bells, for example, the rotational velocity of the pipe may vary to provide a consistent linear velocity at the outer diameter.

[0041] After wrapping is complete, the wrapped pipe may be held for cooling. Additional post-wrap processes may include removal of any wrap material over the spigot and/or the bell. For example, the exterior surface of the spigot may need to remain unwrapped to properly connect with other pipes. In order to remove the wrapping, should the wrapping process cover the spigot, a mechanism may cut the wrap covering the spigot and remove the

wrap, exposing the exterior surface of the spigot. In some embodiments, the wrap process may not wrap the spigot, which may eliminate the need for a removal step.

[0042] The specification has described pipe with an outer wrap. The illustrated steps are set out to explain the exemplary embodiments shown, and it should be anticipated that ongoing technological development will change the manner in which particular functions are performed. These examples are presented herein for purposes of illustration, and not limitation. Further, the boundaries of the functional building blocks have been arbitrarily defined herein for the convenience of the description. Alternative boundaries can be defined so long as the specified functions and relationships thereof are appropriately performed. Alternatives (including equivalents, extensions, variations, deviations, etc., of those described herein) will be apparent to persons skilled in the relevant art(s) based on the teachings contained herein. Such alternatives fall within the scope and spirit of the disclosed embodiments. Also, **the words** "comprising," "having," "containing," and "including," and other similar forms are intended to be equivalent in meaning and be open ended in that an item or items following any one of these words is not meant to be an exhaustive listing of such item or items, or meant to be limited to only the listed item or items. It must also be noted that as used herein and in the appended claims, **the singular forms** "a," "an," and "the" include plural references unless the context clearly dictates otherwise.

[0043] It is intended that the disclosure and examples be considered as exemplary only, whereas the invention is defined by the following claims.

Claims

1. A pipe (200) for drainage of soil and transportation of surface water comprising:
 - an axially extended bore defined by a corrugated outer wall, wherein the corrugated outer wall comprises plastic; and
 - an outer wrap (230) applied to the outer wall, wherein:
 - the outer wrap (230) comprises plastic, and
 - the outer wrap (230) is applied in an overlapping helical pattern (232) completely covering the corrugated outer wall.
2. The pipe (200) of claim 1, wherein the plastic of the bore and the plastic of the outer wrap (230) are different types of plastic.
3. The pipe (200) of claim 1, wherein the plastic of the outer wall and the plastic of the outer wrap (230) are welded together.
4. The pipe (200) of claim 1, wherein the axially ex-

tended bore is made of high density polyethylene (HDPE) or polypropylene (PP).

5. The pipe (200) of claim 1, wherein the outer wrap (230) is made of high density polyethylene (HDPE) or polypropylene (PP) or polyvinyl chloride (PVC).

6. A method of preparing the pipe (200) according to claim 1, wherein an outer wrap (230) is applied to a corrugated pipe (100), the method comprising:

cutting a corrugated pipe (100) to a final length or a usable length;
determining a wrap type to be applied to the corrugated pipe (100);
determining a flow rate for applying a wrap of the wrap type based on a type of plastic used in the wrap, a type of fiber used in the wrap, and the wrap type;
applying a wrap made of the type of fiber and the type of plastic to the corrugated pipe (100) using the determined flow rate producing a smooth outer surface.

7. A method of preparing a pipe (200) according to claim 1, wherein an outer wrap (230) is applied to a corrugated pipe (100), the method comprising:

extruding an uncut corrugated pipe (100) from a pipe extrusion device;
determining a wrap type to apply to the uncut corrugated pipe (100);
determining a flow rate for applying a wrap of the wrap type based on a type of plastic used in the wrap, a type of fiber used in the wrap, and the wrap type;
applying a wrap made of the type of fiber and the type of plastic to the corrugated pipe (100) using the determined flow rate producing a smooth outer surface.

8. The method of claim 6 or 7, wherein the type of fiber comprises continuous strand fiber.

9. The method of claim 6 or 7, wherein the type of fiber comprises short strands of fiber.

10. The method of claim 6 or 7, wherein the wrap type may include one or more of: oriented continuous strand fiber, semi-oriented non-continuous fiber, fiberglass impregnation, or no fiber.

11. The method of claim 6, wherein applying the wrap includes controlling the thickness of the outer wrap by varying the ratio of pull rate to extrusion flow rate.

12. The method of claim 7, wherein applying the wrap comprises:

applying the wrap from a rotating wrap extrusion device that circumscribes an outer surface of the uncut corrugated pipe (100) with the wrap.

13. The method of claim 6 or 7, further comprising:

heating the type of plastic used in the wrap to a predetermined temperature; and
extruding the type of plastic at the determined flow rate, wherein the flow rate ranges from 0.0762 to 0.127 metres per second.

Patentansprüche

1. Rohr (200) zur Entwässerung des Bodens und zum Transport von Oberflächenwasser, umfassend:

eine sich axial erstreckende Bohrung, die durch eine gewellte Außenwand definiert ist, wobei die gewellte Außenwand Kunststoff umfasst; und
eine an der Außenwand angebrachte Außenummantelung (230), wobei:

die Außenummantelung (230) Kunststoff umfasst und

die Außenummantelung (230) in einem überlappenden schraubenförmigen Muster (232) angebracht ist, das die gewellte Außenwand vollständig bedeckt.

2. Rohr (200) nach Anspruch 1, wobei der Kunststoff der Bohrung und der Kunststoff der Außenummantelung (230) unterschiedliche Kunststoffarten sind.

3. Rohr (200) nach Anspruch 1, wobei der Kunststoff der Außenwand und der Kunststoff der Außenummantelung (230) miteinander verschweißt sind.

4. Rohr (200) nach Anspruch 1, wobei die sich axial erstreckende Bohrung aus Polyethylen hoher Dichte (HDPE) oder Polypropylen (PP) hergestellt ist.

5. Rohr (200) nach Anspruch 1, wobei die Außenummantelung (230) aus Polyethylen hoher Dichte (HDPE) oder Polypropylen (PP) oder Polyvinylchlorid (PVC) hergestellt ist.

6. Verfahren zum Anfertigen des Rohrs (200) nach Anspruch 1, wobei eine Außenummantelung (230) an einem gewellten Rohr (100) angebracht wird, wobei das Verfahren Folgendes umfasst:

Zuschneiden eines gewellten Rohres (100) auf eine endgültige Länge oder eine nutzbare Länge;

Bestimmen einer Ummantelungsart, die an dem gewellten Rohr (100) anzubringen ist;

Bestimmen eines Durchsatzes zum Anbringen einer Ummantelung der Ummantelungsart basierend auf einer Kunststoffart, die in der Ummantelung verwendet wird, einer Faserart, die in der Ummantelung verwendet wird, und der Ummantelungsart;

Anbringen einer Ummantelung, die aus der Faserart und der Kunststoffart hergestellt ist, an dem gewellten Rohr (100) unter Verwendung des bestimmten Durchsatzes, wodurch eine glatte Außenoberfläche erzeugt wird.

7. Verfahren zum Anfertigen eines Rohrs (200) nach Anspruch 1, wobei eine Außenummantelung (230) an einem gewellten Rohr (100) angebracht wird, wobei das Verfahren Folgendes umfasst:

Extrudieren eines ungeschnittenen gewellten Rohrs (100) von einer Rohrextrusionsvorrichtung;

Bestimmen einer Ummantelungsart, die an dem ungeschnittenen gewellten Rohr (100) anzubringen ist;

Bestimmen eines Durchsatzes zum Anbringen einer Ummantelung der Ummantelungsart basierend auf einer Kunststoffart, die in der Ummantelung verwendet wird, einer Faserart, die in der Ummantelung verwendet wird, und der Ummantelungsart;

Anbringen einer Ummantelung, die aus der Faserart und der Kunststoffart hergestellt ist, an dem gewellten Rohr (100) unter Verwendung des bestimmten Durchsatzes, wodurch eine glatte Außenoberfläche erzeugt wird.

8. Verfahren nach Anspruch 6 oder 7, wobei die Faserart eine Endlosstrangfaser umfasst.

9. Verfahren nach Anspruch 6 oder 7, wobei die Faserart kurze Faserstränge umfasst.

10. Verfahren nach Anspruch 6 oder 7, wobei die Ummantelungsart eine oder mehrere von Folgenden enthalten kann: orientierte Endlosstrangfaser, halb orientierte endliche Faser, Glasfaserimprägnierung oder keine Faser.

11. Verfahren nach Anspruch 6, wobei das Anbringen der Ummantelung Steuern der Dicke der Außenummantelung durch Variieren des Verhältnisses zwischen Zuggeschwindigkeit und Extrusionsdurchsatz enthält.

12. Verfahren nach Anspruch 7, wobei das Anbringen der Ummantelung Folgendes umfasst:

Anbringen der Ummantelung von einer rotierenden Ummantelungsextrusionsvorrichtung, die eine Außenoberfläche des ungeschnittenen gewellten

Rohrs (100) mit der Ummantelung umschreibt.

13. Verfahren nach Anspruch 6 oder 7, ferner umfassend:

Erhitzen der in der Ummantelung verwendeten Kunststoffart auf eine vorbestimmte Temperatur; und

Extrudieren der Kunststoffart mit dem bestimmten Durchsatz, wobei der Durchsatz im Bereich von 0,0762 bis 0,127 Metern pro Sekunde liegt.

Revendications

1. Tuyau (200) pour le drainage du sol et le transport des eaux de surface comprenant :

un alésage étendu axialement défini par une paroi extérieure ondulée, dans lequel la paroi extérieure ondulée comprend du plastique ; et une enveloppe extérieure (230) appliquée à la paroi extérieure, dans lequel :

l'enveloppe extérieure (230) comprend du plastique, et

l'enveloppe extérieure (230) est appliquée selon un motif hélicoïdal superposé (232) recouvrant complètement la paroi extérieure ondulée.

2. Tuyau (200) selon la revendication 1, dans lequel le plastique de l'alésage et le plastique de l'enveloppe extérieure (230) sont des types de plastique différents.

3. Tuyau (200) selon la revendication 1, dans lequel le plastique de la paroi extérieure et le plastique de l'enveloppe extérieure (230) sont soudés ensemble.

4. Tuyau (200) selon la revendication 1, dans lequel l'alésage étendu axialement est constitué de polyéthylène haute densité (PEHD) ou de polypropylène (PP).

5. Tuyau (200) selon la revendication 1, dans lequel l'enveloppe extérieure (230) est constituée de polyéthylène haute densité (PEHD) ou de polypropylène (PP) ou de polychlorure de vinyle (PVC).

6. Procédé de préparation du tuyau (200) selon la revendication 1, dans lequel une enveloppe extérieure (230) est appliquée à un tuyau ondulé (100), le procédé comprenant :

la découpe d'un tuyau ondulé (100) à une longueur finale ou une longueur utilisable ;

la détermination d'un type d'enveloppe à appli-

- quer au tuyau ondulé (100) ;
la détermination d'un débit pour l'application
d'une enveloppe du type d'enveloppe sur la
base d'un type de plastique utilisé dans l'enve-
loppe, d'un type de fibre utilisé dans l'enveloppe 5
et du type d'enveloppe ;
l'application d'une enveloppe constituée du type
de fibre et du type de plastique au tuyau ondulé
(100) en utilisant le débit déterminé produisant
une surface extérieure lisse. 10
7. Procédé de préparation d'un tuyau (200) selon la
revendication 1, dans lequel une enveloppe exté-
rieure (230) est appliquée à un tuyau ondulé (100), le
procédé comprenant : 15
- l'extrusion d'un tuyau ondulé non coupé (100) à
partir d'un dispositif d'extrusion de tuyau ;
la détermination d'un type d'enveloppe à appli-
quer au tuyau ondulé non coupé (100) ; 20
la détermination d'un débit pour l'application
d'une enveloppe du type d'enveloppe sur la
base d'un type de plastique utilisé dans l'enve-
loppe, d'un type de fibre utilisé dans l'enveloppe
et du type d'enveloppe ; 25
l'application d'une enveloppe constituée du type
de fibre et du type de plastique au tuyau ondulé
(100) en utilisant le débit déterminé produisant
une surface extérieure lisse. 30
8. Procédé selon la revendication 6 ou 7, dans lequel le
type de fibre comprend une fibre à brin continu.
9. Procédé selon la revendication 6 ou 7, dans lequel le
type de fibre comprend des brins courts de fibre. 35
10. Procédé selon la revendication 6 ou 7, dans lequel le
type d'enveloppe peut comprendre un ou plusieurs
éléments parmi : une fibre à brin continu orienté, une
fibre non continue semi-orientée, une imprégnation 40
de fibre de verre ou aucune fibre.
11. Procédé selon la revendication 6, dans lequel l'ap-
plication de l'enveloppe comprend le contrôle de
l'épaisseur de l'enveloppe extérieure en faisant va-
rier le rapport entre le taux de traction et le débit
d'extrusion. 45
12. Procédé selon la revendication 7, dans lequel l'ap-
plication de l'enveloppe comprend : 50
l'application de l'enveloppe à partir d'un dispositif
d'extrusion d'enveloppe rotatif qui circonscrit une
surface extérieure du tuyau ondulé non coupé
(100) avec l'enveloppe. 55
13. Procédé selon la revendication 6 ou 7, comprenant
en outre :

la chauffe du type de plastique utilisé dans l'en-
veloppe à une température prédéterminée ; et
l'extrusion du type de plastique au débit déter-
miné, dans lequel le débit est compris entre
0,0762 et 0,127 mètre par seconde.

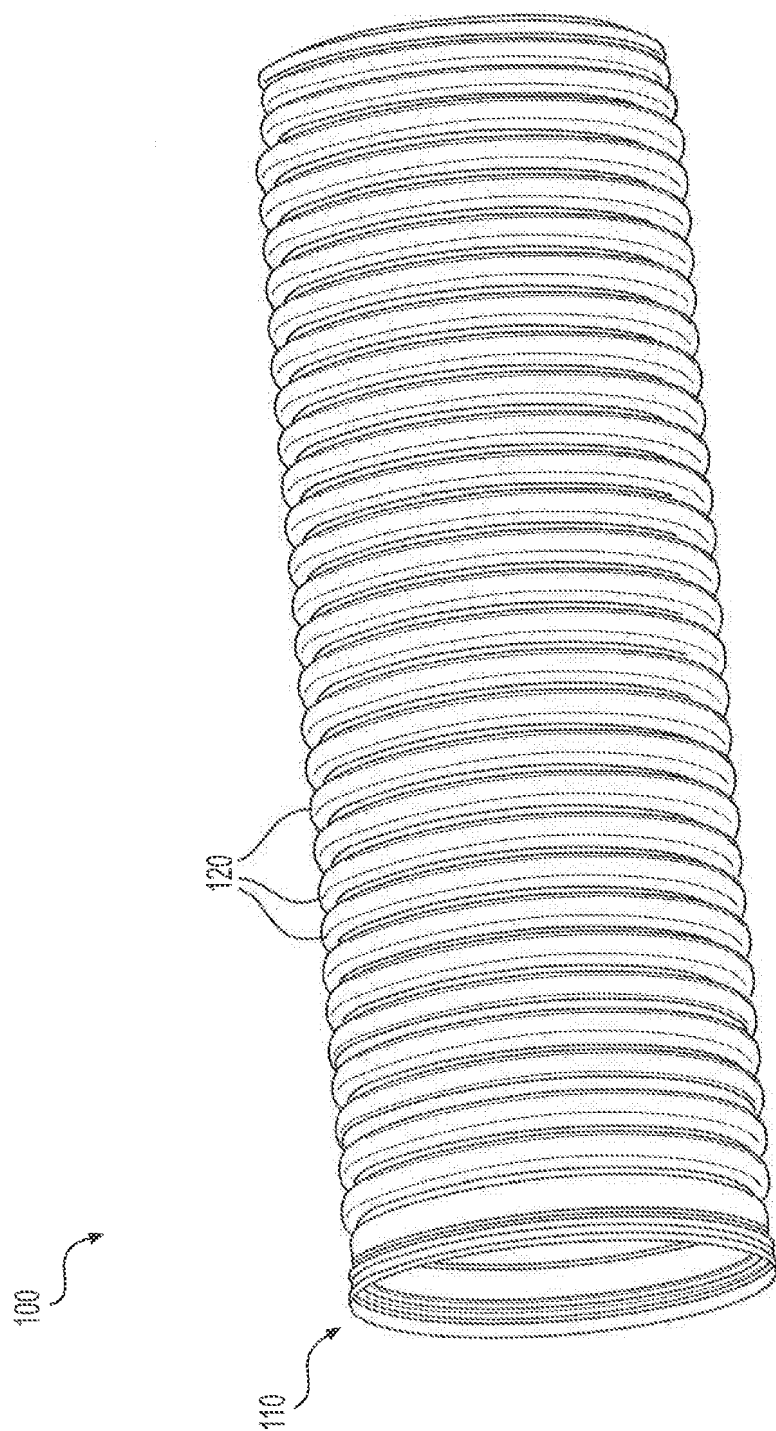


FIG. 1

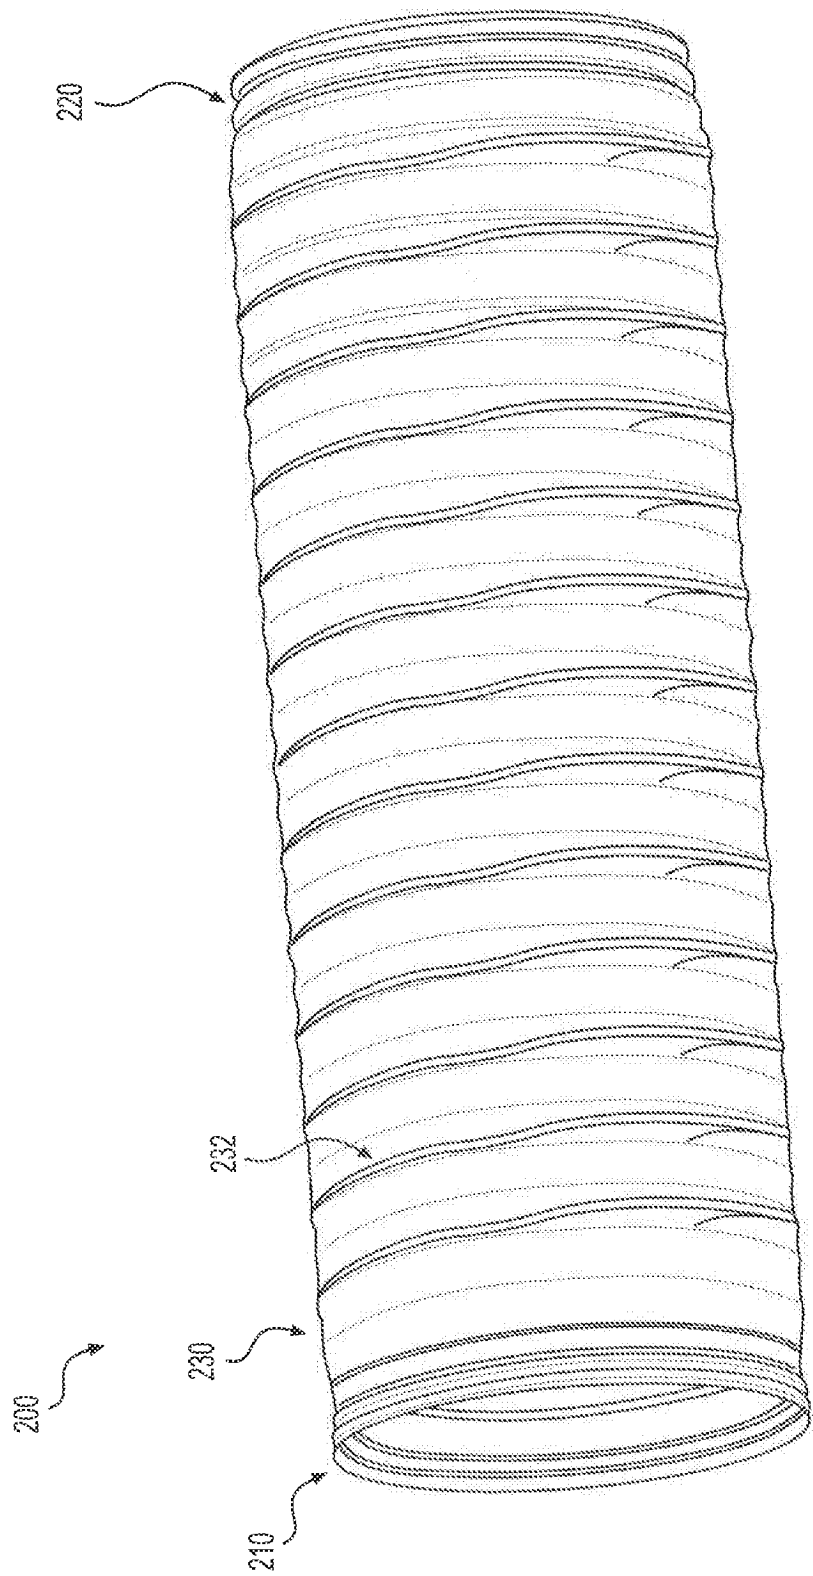


FIG. 2

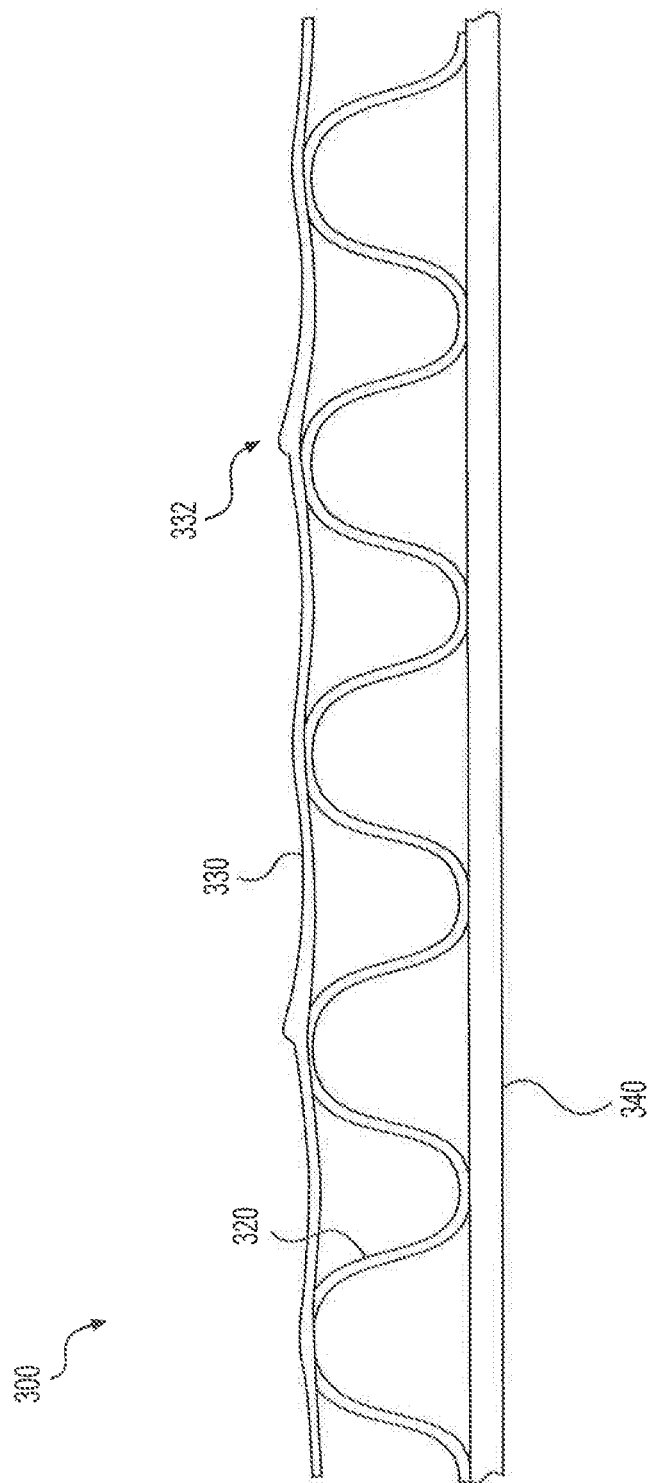


FIG. 3

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- GB 550448 A [0002]
- WO 2005063465 A1 [0002]
- US 2004099324 A1 [0002]
- US 2007062595 A1 [0002]
- US 2008210327 A1 [0002]
- US 2010224306 A1 [0002]
- GB 2424935 A [0002]
- WO 9428694 A1 [0002]
- US 5089074 A [0002]